

# A Comparative Study of Rectangular and Circular Microstrip Fed Patch Antenna at 2.45 GHz

Mohammad Monirujjaman Khan, A.K.M Monsurul Alam, Ratil Hasnat Ashique

**Abstract**— A Comparative study of rectangular and circular shape microstrip fed patch antennas for bluetooth application is presented in this paper. The resonance frequency is chosen at 2.45 GHz which is suitable for industrial scientific and medical (ISM) band applications. Computer Simulation Technology (CST) microwave studio is used as the software environment to design and compare the performance of the antennas. Based on the results and analysis, it is noted that the rectangular patch antenna shows about 6 dB higher return loss than the return loss of circular patch antenna. In addition, rectangular patch antenna has improved gain value of 7.12 dB than that of the circular patch with gain of 6.87 dB. However, circular patch antenna offers 5.5 MHz higher bandwidth as compared with the rectangular patch. The radiation efficiency of both rectangular and circular shaped microstrip fed patch antennas is nearly the same.

**Index Terms**— Bandwidth, circular patch, gain, rectangular patch, return loss.

## 1 INTRODUCTION

IN the era of modern world where communication has become indispensable, antennas are rightly to be said as electronic eyes and ears of the world due to their undeniable place in the communication technology. While, the revolution in antenna engineering leads the fast growing communication systems, Microstrip Patch Antennas have been one of the most innovative developments in the era of miniaturization. Microstrip Patch Antennas are increasingly finding their applications in a broad range of microwave systems from radars, telemetry, navigation, biomedical systems, mobile and satellite communications, missile systems, global positioning system (GPS) for remote sensing and etc. because of their light weight, low volume, low cost, low profile, ease of fabrication, conformability to mounting hosts and ability to be printed directly onto a circuit board.

The conventional structure of a Microstrip Patch antenna comprises of a metallic radiating patch element, embedded into a grounded dielectric substrate. The shape of the conducting patch can be of any geometrical form among which rectangular and circular are the most common. The rectangular and circular Microstrip patch antennas are used as simple and for the extensive and most demanding applications as they easily provide with feed line flexibility, multiple frequency operation, linear and circular polarizations, frequency agility, good bandwidth etc. A circular patch antenna fed by an aperture coupled microstrip line has been demonstrated in [1]. In [2] a rectangular microstrip patch antenna with EBG structure has been presented. Rectangular and circular microstrip patch antenna can be employed for multi-frequency operation.

A dual band circular patch antenna is presented in [3] which is smaller than the conventional antenna for wideband application and a triple band capacitive-fed circular patch antenna with arc shaped slots that covers 2380 – 2508 MHz and 5100 – 6030 MHz is proposed in [4]. By introducing a twin-diamond shaped patch and a gap-coupled feed structure, a left-handed circularly polarized (LHCP) antenna has been obtained in [5]. Even six linear polarizations are also possible with a circular patch antenna using coaxial-fed at centre with 12 p-i-n diodes placed across a circular ring slot on the patch, as proposed in [6].

Another reason for the popularity of the rectangular and circular patch antenna is their compatibility to array configurations. Rectangular and circular patches are very popular shapes for microstrip patch antenna array constructions. The design of a four by one (4×1) patch array microstrip rectangular antenna with microstrip line feeding based on quarter wave impedance matching technique and with centre frequency at 2.5GHz for WiMAX application has been presented in [7]. In [8] 1×4 rectangular microstrip array antennas have been designed at 16 GHz resonant frequency for Ku Band usage and for each antenna, electrical parameters like S11 response directivity, gain, radiation efficiency etc. are investigated for 26 array antennas in simulation media HFSS v12 by changing the feed line widths systematically.

However, Microstrip patch antennas have some major disadvantages as narrow bandwidth, low gain and low power handling capability. A narrow BW of approximately 1-5% is the most major limiting factor for the widespread applications of Microstrip Patch antennas. Therefore, to overcome those limitations several methods have been introduced which includes modification of the patch shapes for wide band [9-12] different types of feeding mechanisms for high gain [13-14] and introduction of different types of slots and cuts [15-16].

This paper work involves a comparative study of a rectangular and a circular patch antenna with line feed, both resonant at the frequency of 2.45 GHz. The comparison has been done on the simulated results obtained from the simulation software Computer Simulation Technology (CST) Microwave studio. The organization of the paper is as follows: section 2 shows

- Author Mohammadmonirujjaman Khan is currently working as an assistant professor in the department of Electronics and Telecommunication Engineering at University of Liberal Arts Bangladesh, Bangladesh, PH-01779006296. E-mail: monirkhan.qmul@gmail.com
- Co-Author AKM Monsurul Alam is currently studying MSc in Aalto University School of Engineering, Finland.
- Co-Author Ratil Hasnat Ashique is currently working as a lecturer in the department of Electrical and Electronic Engineering at Primeasia University, Bangladesh, PH-029822133. E-mail: ratil.eee05@gmail.com

the antenna design; the simulated results are discussed in Section 3 and finally section 4 provides the conclusion of the presented study.


## 2 ANTENNA DESIGN

Both rectangular and circular shaped microstrip fed patch antennas were designed using computer simulation technology (CST) microwave studio software. The proposed antennas have been designed on the substrate roger RT5880 for a good dielectric constant of 3. The other parameters used to design two configurations antenna have been shown in Table 1.

TABLE 1  
 LIST OF DESIGN PARAMETER

Parameter	Rectangular	Circular
Operating Frequency	2.45 GHz	2.45 GHz
Patch size	Width W= 34 mm Length L=33.4 mm	Radius, a= 19.8 mm
Substrate Height, h	1.454 mm	1.454mm
Patch Thickness, Mt	0.035mm	0.035mm
Transmission Line Length, $L_f$	49.8 mm	28.8
Transmission Line Width, $W_f$	0.035mm	0.035mm
Dielectric Constant, $\epsilon_r$	3	3

The software designed versions of both antennas are shown in the figs. 1(a) and 1 (b).

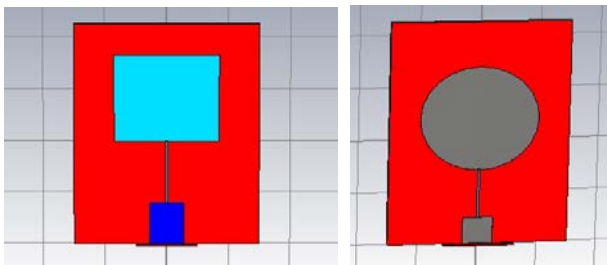

(a) Rectangular Patch (b) Circular Patch

Fig. 1. Structure of the proposed Rectangular Patch and Circular Patch Antennas.

## 3 SIMULATION RESULTS AND DISCUSSION

The return loss responses for both antenna cases are shown in the figs 2 and 3, respectively. Fig. 2 and Fig. 3 show that at the resonant frequency the minimum return loss value of the rectangular -28.28 dB, whereas for circular patch antenna the return loss has a minimum value of -22.03 dB at the resonant frequency specifying that a approximate 6 dB of better return loss value occurs for the rectangular patch antenna at the same

resonant frequency. In case of -10 dB impedance bandwidth (Fig. 4 and Fig. 5) consideration, the circular patch antenna shows a bandwidth of 27 MHz whereas the rectangular patch antenna shows bandwidth of 24 MHz so; circular patch antenna gives better performance in this regards.

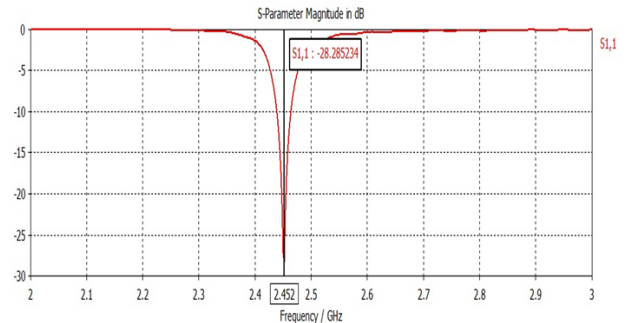


Fig. 2. Return loss response of Rectangular Patch Antenna.

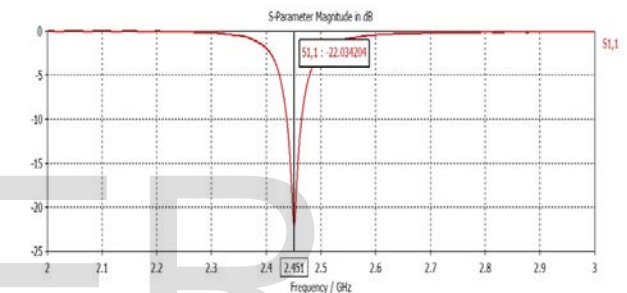


Fig. 3. Return loss response of Circular Patch Antenna.

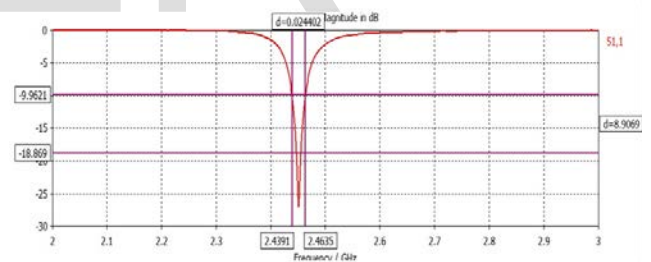


Fig. 4. Bandwidth calculation for Rectangular Patch Antenna

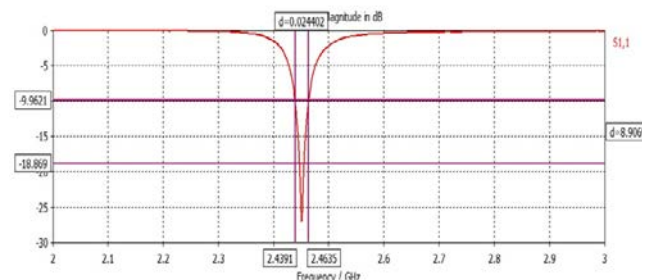


Fig. 5. Bandwidth calculation for Circular Patch Antenna.

The 3-D radiation patterns and polar plot radiation patterns of the software designed both rectangular and circular patch antennas are shown in the figure 6, 7, 8 and 9, respectively. From the 3-D radiation pattern it is noted that both antenna show directive radiation pattern. From the polar plot of radiation pattern (Fig 8. and Fig. 9) it can be seen that the directivity occurs with approximately same value for both rectangular and circular patch antenna. However, the 3dB

angular beam width (i.e. HPBW) of circular patch antenna has a better value of 77.7 deg than the rectangular patch with 72.2 deg. beam width. Again the side lobe level for the circular patch is approximately 9 dB lower than the rectangular patch. Therefore, the circular patch antenna has a better radiation pattern when compared circular patch antenna patch antenna.

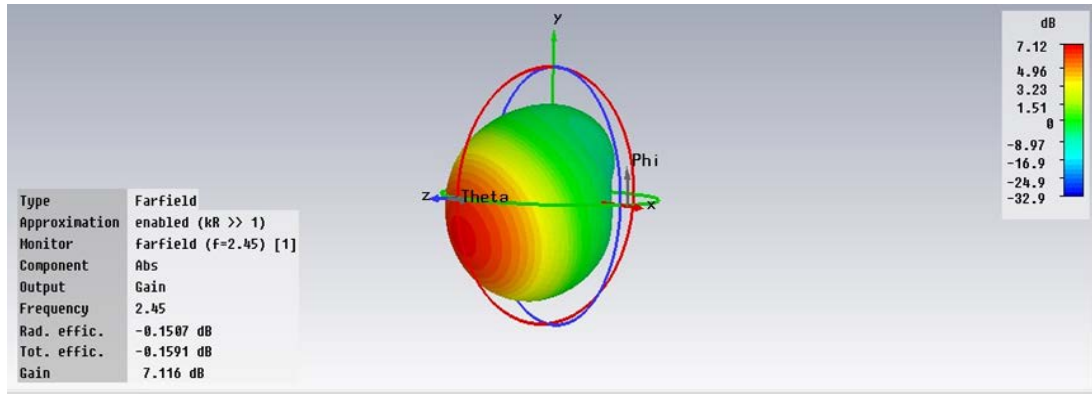


Fig. 6. 3D Radiation Pattern for Rectangular Patch Antenna

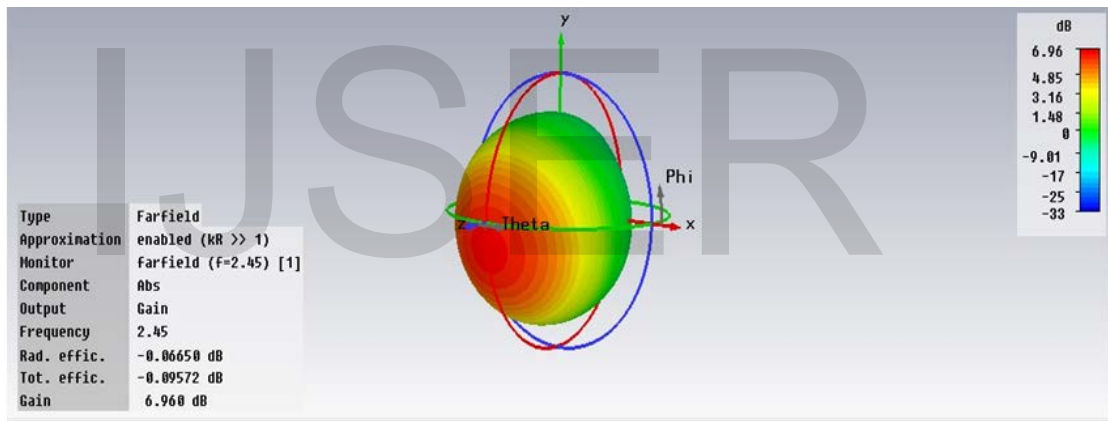


Fig. 7. 3D radiation pattern for Circular Patch Antenna

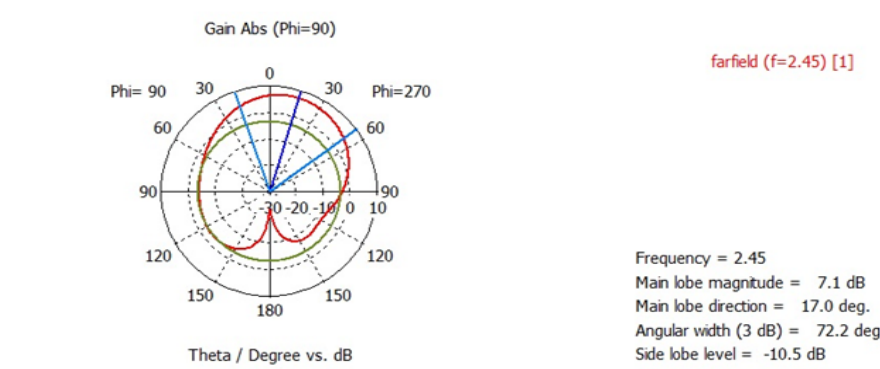


Fig. 8. Polar plot radiation pattern of Rectangular Patch Antenna.

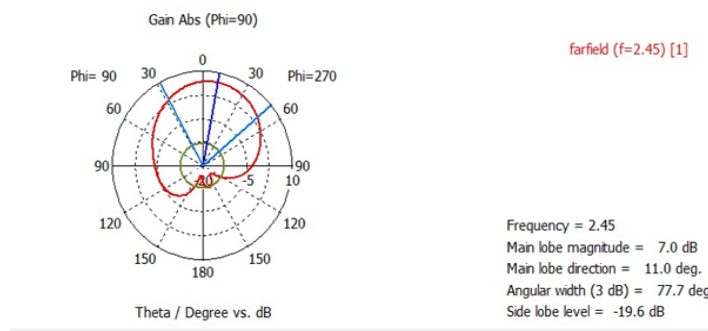


Fig. 8. Polar plot radiation pattern of Circular Patch Antenna.

From the radiation pattern plot (Fig. 6 and Fig. 7) gain of both antennas can be calculated. The rectangular patch antenna has a gain of 7.116 dBi while the gain of circular one is 6.968 dBi.

The overall comparison of different performance parameters of rectangular and circular patch antennas have been summarized in table 2. From perspective of return loss, rectangular antenna shows superiority over the circular one and when bandwidth and side lobe levels are considered circular patch antenna becomes superior over the rectangular. However, both the antennas exhibit same radiation efficiency and total radiation efficiency and nearly same directivity which make them compatible for similar applications.

TABLE 2  
 COMPARISON OF PERFORMANCE PARAMETERS

Parameter	Rectangular	Circular
Return Loss	28.28 dB	22.03 dB
Bandwidth	24 MHz	27 MHz
Directivity	7.267 dBi	7.027 dBi
HPBW	72.2 deg	77.7 deg
Side Lobe Level	-10.5 dB	-19.6 dB
Gain	7.119 dB	6.968 dB
Radiation Efficiency	97%	98%
Total Efficiency	96%	97%

#### 4 CONCLUSION

Comparison between a rectangular patch antenna and a circular patch antenna using the simulation results obtained from CST Microwave studio has been carried out. Both the antenna configurations show quite good results on perspectives of return loss, VSWR, gain and radiation efficiency, for Bluetooth band applications. However, from the perspective of return loss and gain the rectangular patch configuration shows better performance, while the circular patch configuration shows better results on bandwidth, radiation pattern, side lobe levels.

#### REFERENCES

- [1] Navarro, J.A., Chang, K., Tolleson, J., Sanzgeri S., Lee, R.Q., "Performance of a 10 GHz circular patch antenna fed by an aperture coupled microstrip line ", Antennas and Propagation Society International Symposium, AP-S. Digest, June 1991.
- [2] Ripin, N., Awang, R.A., Sulaiman, A.A., Baba, N.H., "Rectangular microstrip patch antenna with EBG structure", IEEE Student Conference on Research and Development (SCORED), December 2012.
- [3] Alabidi, Ebrahim Sailan, Kamarudin, M.R., Rahman, T.A., Iddi, Hashimu Uledi, Jamlos, M.F., "Dual-band circular patch antenna for wideband application", IEEE Antennas and Propagation Society International Symposium (APSURSI), July 2013.
- [4] Chen, Jianling, Tong, Kin-Fai, Wang, Junhong, "A triple band arcshaped slot patch antenna for UAV GPS/Wi-Fi applications", Proceedings of the International Symposium on Antennas & Propagation (ISAP), Volume 01, October 2013.
- [5] Xuehui Li, Xueshi Ren, Yingzeng Yin, Lu Chen, Zedong Wang, "A wideband twin-diamond-shaped circularly polarized patch antenna with gap-coupled feed", Progress In Electromagnetics Research, Volume 139, April 2013.
- [6] Chang, L.-H., Lai, W.-C., Cheng, J.-C., Hsue, C.-W., "A symmetrical reconfigurable multipolarization circular patch antenna", IEEE Antennas and Wireless Propagation Letters , Volume 13, January 2014.
- [7] A. Wahab, N., Bin Maslan, Z., Muhamad, W.N.W., Hamzah, N., "Microstrip rectangular 4x1 patch array antenna at 2.5ghz for wimax application", Second International Conference on Computational Intelligence, Communication Systems and Networks (CICSyN), July 2010.
- [8] O. Dundar, D. Uzer, S. S. Gultekin, M. Bayrak, "Effects of microstrip feed line width on 1x4 rectangular microstrip antenna array electrical parameters and estimation with artificial neural networks", Progress In Electromagnetics Research Symposium Proceedings, March 2012.
- [9] M. T. Islam, M. N. Shakib, N. Misran, "Broadband e-h shaped microstrip patch antenna for wireless systems", Progress In Electromagnetics Research, PIER 98, 163-173, 2009.
- [10] A. A. Lotfi Neyestanak, "Ultra wide band rose leaf microstrip patch antenna", Progress In Electromagnetics Research, PIER 86, 155-168, 2008.
- [11] Dheeraj Bhardwaj, D. Bhatnagar, S. Sancheti, "Radiations from double notched square patch antenna on fr4 substrate", Journal of Microwaves, Optoelectronics and Electromagnetic Applications, Vol. 7, No.2, December 2008.
- [12] B.-K. Angand, B.-K. Chung, "A wideband e-shaped microstrip patch antenna for 5-6 ghz wireless communications", Progress In Electromagnetics Research, PIER 75, 397-407, 2007.

- [13] M. T. Islam, M. N. Shakib, N. Misran, "Design analysis of high gain wideband l-probe fed microstrip patch antenna", Progress In Electromagnetics Research, PIER 95, 397-407, 2009.
- [14] Gautam, A.K., Yadav, S., Kanaujia, B.K., "CPW-fed compact uwb microstrip antenna", IEEE Antennas and Wireless Propagation Letters, Volume 12, 2013.
- [15] Alishir MoradiKordalivand, Tharek A. Rahman, "Broadband modified rectangular microstrip patch antenna using stepped cut at four corners method", Progress In Electromagnetics Research, Vol.137, 599-619, 2013.
- [16] S. Costanzo, A. Costanzo, "Compact u-slotted antenna for broadband radar applications", Journal of Electrical and Computer Engineering, Volume 2013.

IJSER