

Development and Performance Testing of a Photovoltaic Powered Forced Convection Solar Dryer in NEH Region of India

Mahendra S. Seveda

Abstract: A photovoltaic powered forced convection solar dryer has been developed and tested its performance for drying chilli under the conditions of NEH region of India. The system consists of a flat plate solar collector cum drying chamber, exhaust fan and solar photo-voltaic module. Experimental investigations were carried out to evaluate the performance of the system by drying chilli. The dryer was capable of holding about 6 kg of chillies per batch. Average air temperature attained in the solar dryer was about 40°C higher than the ambient temperature. Drying of chilli in a photovoltaic powered forced convection solar dryer reduces the moisture content from around 80.2% (w.b.) to the final moisture content about 10.00% (w. b.) in 32 h.

Keywords: Solar Dryer, Photovoltaic, Forced Convection, Drying Rate, Chilli Drying.

I. Introduction

Drying is an essential process used all over the world for the preservation of farm produce. It helps in reducing the water activity of the produce to a level below which deterioration does not occur for a definite duration. Open sun drying is still widely used in many tropical and subtropical countries [1]. Open sun drying is the cheapest method, but the quality of the dried products is far below the international standards. Improvement of product quality and reduction of losses can only be achieved by the introduction of suitable drying technologies [2]. However, this method of drying is extremely weather dependent and has the problems of contamination, infestation, microbial attacks, etc., thus affecting the product quality. The rate of drying depends on various parameters such as solar radiation, ambient temperature, wind velocity, relative humidity and initial moisture content, type of crops, crop absorptivity and mass of product per unit exposed area. This form of drying has many drawbacks such as degradation by wind, blown, debris, rain and insect infestation, human and animal interference that will result in contamination of the product [3]. Drying rate will reduce due to intermittent sunshine, interruption and wetting by rain.

Solar drying is a well-known food preservation procedure used to reduce the moisture content of agricultural products, which reduces quality degradation over an extended storage period. Several Solar crop dryers are a viable alternate to open sun drying, and have several advantages. They offer better quality dried products as the products are protected; drying time is also significantly reduced. Several types of solar dryers have been developed and used to dry a variety of agricultural product. Solar dryers using natural convection or forced circulation have been investigated to overcome these problems [4]. For commercial applications, the ability of the dryer to process continuously throughout the day is very important to dry the products to its safe storage level and to maintain the quality [5].

Solar dryers may be classified according to the mode of air flow as natural convection and forced convection dryers. Natural convection dryers do not require a fan to blow the air through the dryer. Solar drying may also be classified into direct, indirect and mixed-modes. In direct solar dryers the air heater contains the materials and solar energy passes through a transparent cover and is absorbed by the materials. Essentially, the heat required for drying is provided by radiation to the upper layers and subsequent conduction into the material bed. In indirect dryers, solar energy is collected in a separate solar collector (air heater) and the heated air then passes through the material bed, while in the mixed-mode type of dryer, the heated air from a separate solar collector is passed through a material bed and at the same time, the drying cabinet or chamber absorbs solar energy directly through the transparent walls or roof [6].

Active solar dryer are also called force convection solar dryer. It is generally agreed that forced convection distributed solar dryer are more effective and more controllable than the natural-circulation type. External force is provided to the solar dryer such as fans may be powered with utility electricity if available, or with a solar photovoltaic panel [7]. In a solar photovoltaic powered, fan is directly coupled to the solar module increasing the solar radiation increase the module's output, thus speeding up the fan.

Chilli is one of the most important commercial crops of India. It is grown almost throughout the country. There are more than 400 different varieties of chillies found all over the world [7]. It is also called as hot pepper, cayenne pepper, sweet pepper, bell pepper, etc. Its botanical name is "Capsicum annum". The world's hottest chilli "Naga Jolokia" is cultivated in hilly terrain of Assam in a small town Tezpur, Assam, India. India is the largest producer of chilli and annually production is around 1.1 million tonnes. India also has the maximum area dedicated to the production of this crop.

Chilli is a universal spice of India [8]. It is cultivated in all states and union territories of the country. Chillies are cultivated seasonally but are consumed throughout the year. Chillies are grown on soils with light sands to well drained clay [9]. Chilli grows best at 20–30°C. Growth and yields suffer when temperatures exceed 30°C or drops below 15°C for extended periods [10]. Chilli is normally dried on open ground with no shelter provided. It is common to see rooftops covered with chilli during the summer months. This practice results in poor final quality associated with huge financial losses to the poor farmers.

II. Materials and Methods

A. Working principle of photovoltaic powered forced convection solar dryer

This dryer was developed to make use of solar energy during day time. As the solar radiations falls on the glass surface some of incidence solar radiation is reflected back to atmosphere and remaining enter inside the dryer, the thermocole sheet inside the solar dryer was black painted to absorb the incident solar radiation. Solar radiation gets absorbed by the produce and inside drying chamber, resulting in an increase of dryer temperature [11].

This process produces temperature difference between the inside and outside cabinet air. Inside the chamber, heated air pick up moisture from the product as it passes through the trays and taken away by the air entering into the drying chamber from the inlet provided at the bottom of the dryer and comes out through the outlet provided on the opposite wall of the drying chamber with the aid of the supplied PV powered dc fan.

B. Experimental set up

Experimental set-up developed and carried out for this study is presented in Fig. 1. The solar dryer consists of solar collector cum drying chamber, trays, exhaust fan and solar PV module. The materials which have been used for the construction of photovoltaic powered forced convection solar dryer for chilli drying were easily obtainable in local market.

The drying chamber was made up of M.S. angle, G.I. sheet and glazing material with the frame size of (700×700) mm², opposite wall size of (700×700) mm² and front side size of (890×700) mm² with the inclination of 45°. The two drying trays were contained inside the drying chamber which is made up of aluminum angle, aluminum strip and steel wire mesh. The lower and upper tray was fitted at the height of 150 mm and 350 mm from the base of the dryer. The size of lower and upper tray was (680×490) mm² and (680×270) mm². Air inlet is provided in the one fourth area of the base with the diameter of 600 mm. The drying chamber is insulated with thermocole of 10 mm thickness. At the one side of the drier an insulated door is provided to facilitate the loading and unloading of the trays. A solar PV panel (module) of

area (280×230) mm² connected with drying chamber. The module has a voltage of 8.5 V, current 0.6A mp and peak power of 5.0 W. The solar PV module is tilted to an angle of 45° with respect to horizontal. It was connected to the exhaust fan provided at the opposite wall of the dryer with the help of electric wire. The dryer was capable of holding about 6 kg of chillies per batch.

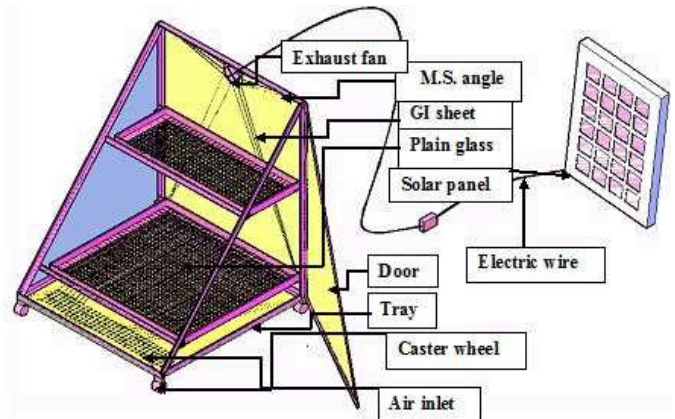


Fig. 1: Schematic diagram of Portable PV powered forced convection solar dryer

C. Experimental procedure

The 6 kg of fresh Chilli were dried until the required final moisture content was attained. The fresh chilli was located over the trays of drying chamber having about 90% perforation. The initial moisture content was calculated by taking three different samples. During the experiment moisture content was calculated at every interval of one hour during the drying hours.

The exhaust fan was operated for reducing of relative humidity inside the solar dryer. The different parameters were observed during the experiment hours at every interval inside and outside the solar dryer. Open sun drying method was also conducted to know the performance of the dryer. Solar dryer was tested for its performance in drying of Chilli by conducting two sets of experiments. The tests were conducted from 08.00 to 16.00 hrs and the hourly data were recorded.

The full load test was conducted for evaluate the performance of the photovoltaic powered forced convection solar dryer in actual loading condition. The dryer contained two trays upper and lower; 4 kg of fresh chilli was placed on the upper tray and remaining in the lower tray i.e. 2 kg of fresh chilli. Loading and unloading was done manually. One kg of fresh Chilli was placed in open air for drying for comparison purpose.

The solar insolation was measured with lux meter, the inside and outside temperature was measured with the digital thermometer and the hygrometer was used to measure relative humidity. Keeping two thermometers and hygrometer inside and one outside the observation was recorded. By using oven drying method the initial moisture content of fresh chilli was determined. The drying was continued till the moisture con-

tent of the Chilli tends to a constant value. The performance of drying unit was evaluated in terms of moisture content variation, drying rate, etc. For this purpose, the hourly reductions in weight of representative sample were recorded.

III.Results and Discussion

The photovoltaic powered forced convection solar dryer has been developed and fabricated in NEH region of India in the workshop of the College of Agricultural Engineering and Post Harvest Technology, Central Agricultural University, Ranipool, Gangtok, Sikkim. The experimental data along with input environmental parameters such as solar insolation, ambient temperature, inside temperature, relative humidity were recorded. The recorded data were analyzed to evaluate the performances.

A.System description of the developed solar dryer

The photovoltaic powered forced convection solar dryer has been developed in the NEH region of India. The dimensions are given below in Table 1. Figure 2 shows a pictorial view of photovoltaic powered forced convection solar dryer designed and developed for drying of chilli.

Table1.Dimensions of PV powered forced convection solar dryer.

Components	Specifications
Aperture area	0.595 m ²
Front base of solar dryer	0.7 m
Width of solar dryer	0.7 m
Nos. of trays	Two
Upper tray size	(680 × 270) mm
Lower tray size	(680×490) mm
Nos. of air inlet	50
Diameter of air outlet	6 mm
Inclination of the dryer	45°
Loading per batch	6 kg
Drying time per batch	4days



Fig.2. Pictorial view of photovoltaic powered forced convection solar dryer

B.Performance evaluation of solar dryer

The performance of solar dryer was evaluated during the month of December, for drying of chilli. The performance evaluation test includes measuring solar insolation, ambient temperature, ambient relative humidity, wind velocity, air flow rate inside the dryer, air temperature and relative humidity inside the solar tunnel dryer. During full load testing, four days are required for drying total amount of Chilli in the solar dryer from moisture content of 80.2 to 10 per cent (w.b.). The testing on full load was conducted for three consecutive days in the month of December.

1.Variation of temperature and solar radiation First day of drying

During the first day of drying in the month of December, it was observed that 65 °C and 57 °C was the maximum temperature inside the solar dryer in upper and lower tray at 14 hours respectively and the minimum temperature for the upper and lower tray was 28 °C and 24 °C at 8 hours respectively. The maximum ambient temperature was 28 °C at 14 hours while minimum was 17 °C at 8 hours respectively.

It was observed that maximum solar radiation inside the dryer was 523 W/m² at 13 hours and minimum was 19 W/m² at 16 hours respectively. The maximum ambient solar radiation was 601W/m² and minimum was 43 W/m². The trend of results is plotted on graphs as shown in Fig. 3 and 4.

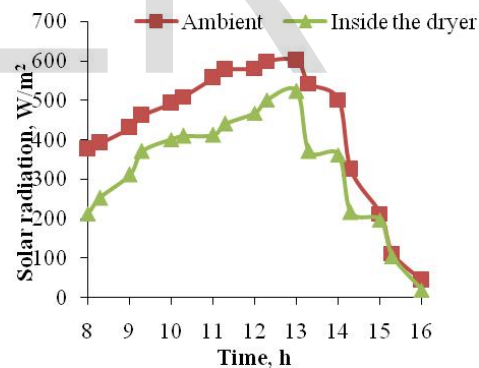


Fig.3 Variation of solar radiation under full load condition in the first day of drying stage

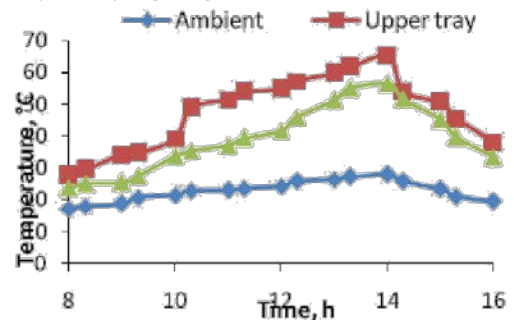


Fig.4 Variation of air temperature under full load condition in first day of drying stage

Second day of drying

During the second day of drying in the month of December, it was observed that 69°C and 57°C was the maximum temperature for the upper and lower tray inside the solar dryer at 14 hours respectively and the minimum temperature for the upper and lower tray was 30°C and 25°C at 8 hours respectively. The maximum ambient temperature was 28 °C at 14 hours while minimum was 17 °C at 8 hours respectively.

It was observed that maximum solar radiation inside the dryer was 535 W/m² at 13 hours and minimum was 19 W/m² at 16 hours respectively. The maximum ambient solar radiation was 609W/m² and minimum was 51 W/m² respectively. The trends of results is plotted on graphs as shown in Fig. 5 and 6.

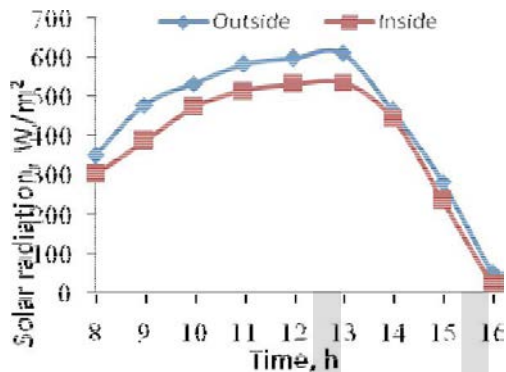


Fig.5 Variation of solar radiation under full load condition in the second day of drying stage

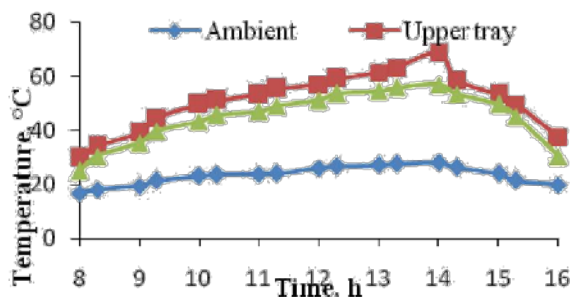


Fig.6 Variation of air temperature under full load condition in second day of drying stage

Third day of drying

During the third day of drying in the month of December, it was observed that 71°C and 68°C was the maximum temperature for the upper and lower tray inside the solar dryer at 14 hours respectively and the minimum temperature for the upper and lower tray was 30°C and 24°C at 8 hours respectively. The maximum ambient temperature was 28°C at 14 hours while minimum was 16°C at 8 hours respectively.

It was observed that maximum solar radiation inside the dryer was 586W/m² at 13 hours and minimum was 30 W/m² at 16 hours respectively.

The maximum ambient solar radiation was 671W/m² and minimum was 65W/m² respectively. The trend of results is plotted on graph as shown in Fig. 7 and 8.

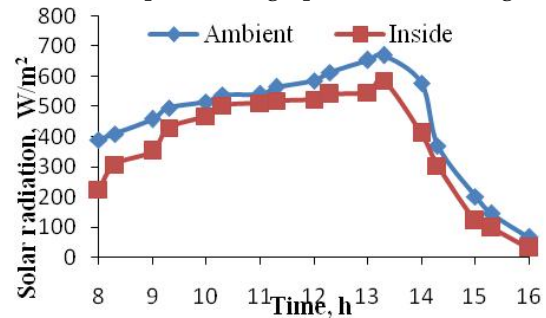


Fig.7 Variation of solar radiation under full load condition in the third day of drying stage

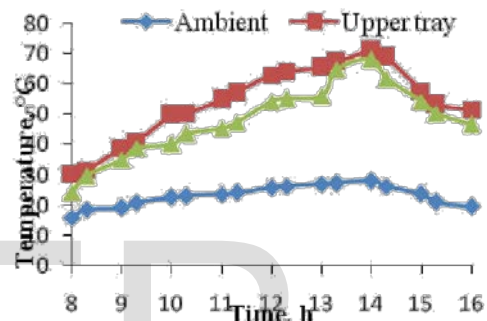


Fig.8 Variation of air temperature under full load condition in third day of drying stage

Fourth day of drying

During the fourth day of drying, it was observed that 69°C and 58°C was the maximum temperature for the upper and lower tray inside the solar dryer at 14 hours respectively and the minimum temperature for the upper and lower tray was 30°C and 27°C at 8 hours respectively. The maximum ambient temperature was 29° C at 14 hours while minimum was 17°C at 8 hours respectively. It was observed that maximum solar radiation was 409 W/m² at xx hours and minimum was 19 W/m² at 16 hours respectively. The maximum ambient solar radiation was 671W/m² and minimum was 65W/m² respectively. The trend of re-sults is plotted on graph as shown in Fig. 9 and 10.

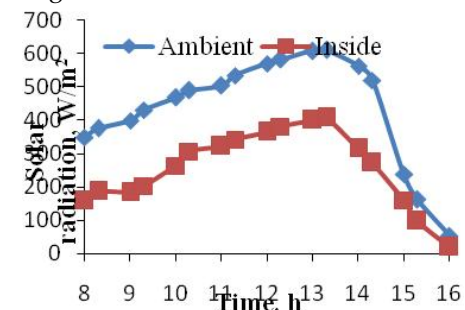


Fig.9 Variation of solar radiation under full load condition in the fourth day of drying stage

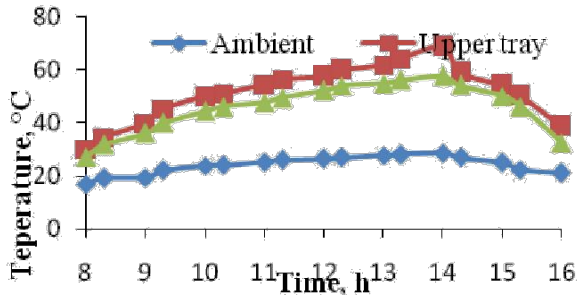


Fig.10 Variation of air temperature under full load condition in fourth day of drying stage

2. Variation of moisture content First day of drying

At the starting of first day the initial moisture content measured at upper and lower tray was 80.2 % and 80.2 % w.b. and at the end of the first day it was 65.1% and 67% w.b. respectively. The reduction in moisture content with time was shown in Fig. 11.

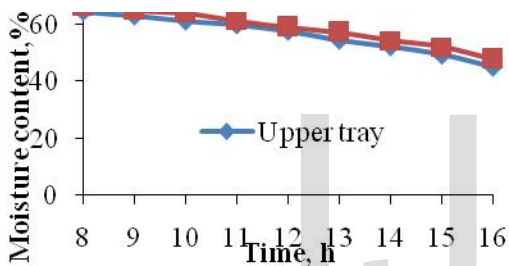


Fig.11. Variation of moisture content with time in the first day of drying stage

Second day of drying

At the starting of Second day the initial moisture content measured at upper and lower tray was 64.65 % and 66.31% w.b. and at the end of the second day it was 45.1% and 47.63% w.b. respectively. The reduction in moisture content with was shown in Fig.12.

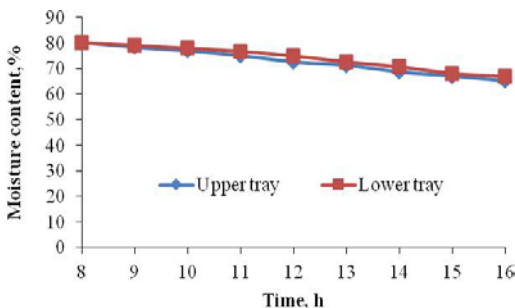


Fig.12. Variation of moisture content with time in the second day of drying stage

Third day of drying

At the starting of third day the initial moisture content measured at upper and lower tray was 44.63 % (w.b.) and 46.11 % (w.b.) and at the end of the third day it was 24.1% and 26.9% w.b. respectively. The reduction in moisture content with time was shown in Fig. 13.

At the starting of third day the initial moisture content measured at upper and lower tray was 23.3% and 24.9% w.b. and at the end of the fourth day it was 10% and 10% w.b. respectively. The reduction in moisture in moisture content with time was shown in Fig. 14.

Fourth day of drying

At the starting of fourth day the initial moisture content measured at upper and lower tray was 23.3% and 24.9% w.b. and at the end of the fourth day it was 10% and 10% w.b. respectively. The reduction in moisture in moisture content with time was shown in Fig. 14.

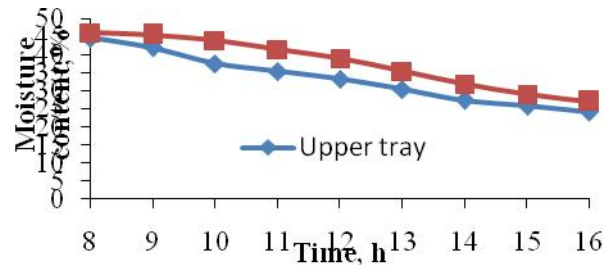


Fig.13. Variation of moisture content with time in the third day of drying stage

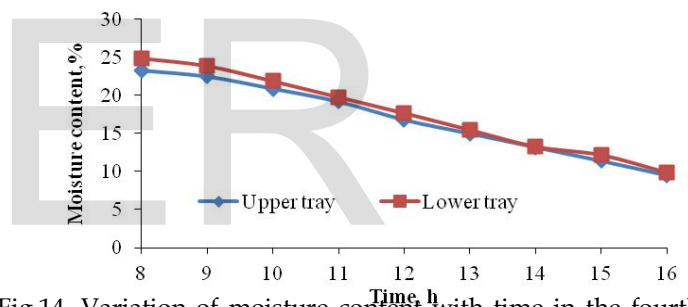


Fig.14. Variation of moisture content with time in the fourth day of drying stage

3.Variation of drying rate

Figure 15 shows the variation of drying rate against drying time. High drying rate (of about 0.5127 kg/hr) was observed during the initial stages of drying. This is because the higher drying rate of the chilli during initial stage of drying results in release of more moisture in the drying air. Drying rate gets decreased with increase in drying time. Drying occurs in the falling rate period with steep fall in moisture content in initial stages of dry-ing and becomes very low in the later stages.

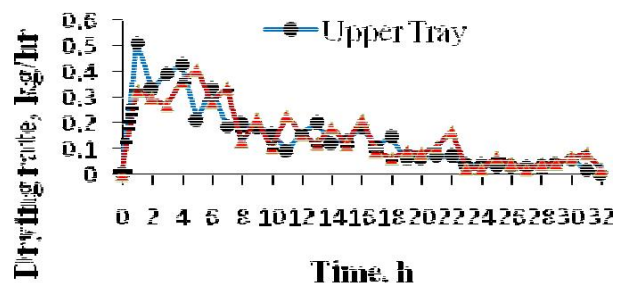


Fig.15. Variation of drying rate with time

C. Open sun drying

It was observed that in open sun drying method the required final moisture content was attained in 56 hours of drying process. It was found that the final required moisture content was 11.9 at the end of the drying. Figure 16 showing the temporal variation of moisture content during the open sun drying process in the month of December.

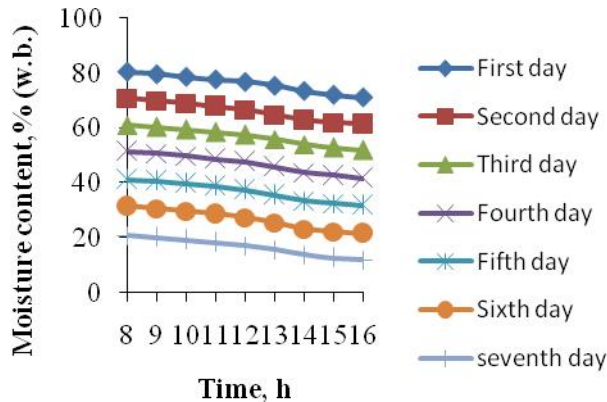


Fig. 16. Variation of moisture content during the open sun drying process

IV. Conclusions

The photovoltaic powered forced convection solar dryer has been developed at workshop and tested at solar yard of College of Agricultural Engineering and Post Harvest Technology, Central Agriculture University, Ranipool, Gangtok, Sikkim in NEH region. The tests were conducted from 0.800 to 16.00 hrs and the hourly recorded. In order to compare the efficiency of drying in photovoltaic powered forced convection solar dryer, open sun drying was also conducted. The chilli was dried within 32 hrs from initial moisture content 80.2% (w.b.) to final moisture content about 10% (w.b.). In order to compare the efficiency of drying in solar dryer PV powered forced convection, open sun drying was also conducted and it was observed that within 56 hrs chilli was dried from moisture content 80.2% (w. b.) to 11.9% (w.b.).

V. Acknowledgment

The author thanks Dean, College of Agricultural Engineering and Post Harvest Technology, Ranipool, Gangtok, Sikkim for providing facilities and assisting in conducting re-search and development work.

References

[1] S. Desai, V. K. Palled, and M. Anantachar "Performance evaluation of farm solar dryer for chilli drying", *Journal of Agriculture Sciences*, Vol. 22(2), pp.382-384, 2008.

[2] F. K. Fortson, M. A. A. Nazha, F. O. Akuffo, and H. Rajakaruna "Design of mixed mode natural convection solar crop dryer: Application

of principles and rules of thumb", *Journal of Renewable energy*, Vol.32, pp. 23 06-2319, 2006.

[3] J. Folarami "Design, constructional and testing of simple solar maize dryer", *Leo-nardo Electronic Journal of Practices and Technology*, Vol. 1, pp. 122-130, 2008.

[4] A. A. Gatea "Design, construction and performance evaluation of solar maize dryer", *Journal of Agriculture Biotechnology and Sustainable Development*, Vol. 2(3), pp. 39-49, 2010.

[5] A. A. Gatea "Performance evaluation of mixed-mode solar dryer evaporating moisture in beans", *Journal of agriculture Biotechnology and Sustainable Development*, Vol. 3(4), pp. 65-71, 2011.

[6] J. Mumba "The development of a photovoltaic powered forced convection solar maize dryer for use in Sub-Saharan Africa", *Journal of RERIC International Energy*, Vol. 18(1), pp. 27-42, 1996.

[7] M. Mohanraj, and P. Chandrasekar "Performance of a forced convection solar dryer integrated with Gravel as heat storage material for chilli drying", *Journal of Engineering Science and Technology*, Vol. 4(3), pp.305-314, 2009.

[8] C. A. Okeke, and A. O. C. Nwokoye "A comparative study of cabinet solar dryer and open sun drying of agriculture produce: (A Case of Unripe Plantain, Breadfruit and Bitter Leaf)", *Journal of Natural and Applied Sciences*, Vol. 9 (1), pp.1- 8, 2008.

[9] J. Prasad, V. K. Vijay, G. N. Tiwari, and V.P.S. Sorayan "Study on performance evaluation of hybrid drier for turmeric drying at village scale", *Journal of Food Engineering*, Vol. 75(4), pp. 496-502, 2004.

[10] R. L. Sawhey, D. R. Pangavadia and P. N. Sarsavadia "Design, development and performance testing of a new natural convection solar dryer", *Energy*, Vol. 27, pp. 579-590, 2000.

[11] M. O. L. Yusuf, and D. Oghenervona "Design and fabrication of a direct natural convection solar dryer for Tapioca", *Leonardo Electronic Journal of Practices and Technology: ISSN 1583-1078*, 2011.

Author Profile

Dr. Mahendra S. Seveda is working as Associate Professor (Renewable Energy) in the College of Agricultural Engineering and Post Harvest Technology, Central Agricultural University, Ranipool, Gangtok, Sikkim. He was Assistant Professor in the Department of Renewable Energy Engineering, College of Technology and Engineering, Maharana Pratap University of Agriculture and Technology, Udaipur, Rajasthan. He accomplished his M. E. and Ph. D. in Renewable Energy Engineering from Maharana Pratap University of Agriculture and Technology, Udaipur, Rajasthan. He has been awarded National Re-newable Energy (NRE) Fellowship sponsored by the Ministry of Non-Conventional Energy Sources (Now Ministry of New and Renewable Energy Sources), Government of India, New Delhi for M.E. and Ph. D. Programme. He has published research papers in several national and interna-

tional journals. He has contribute three Book Chapters in the Hand Book of Renewable Energy Technology, Editors Ahmed F. Zobaa and Ramesh C. Bansal, World Scientific Publishing Co., Singapore. He has attended many national and international seminar and conferences. He has organized many training programmes in the field of renewable energy engineering. He has received Bhartiya Govansha Samvardhan Partisthan Award in Animal Energy (2007-08) of the Indian Society of Agricultural Engi-neers (ISAE) for significant contribution in the field of Energy. He has also received best paper award in the national conference in the field of Renewable Energy. He is the exter-nal examiner of many universities i. e. Rajasthan Technical University, Kota, MPUAT, Udaipur, OUAT, Bhubaneswar, DYSPUHF, Solan and UBKV, Cooch Behar, west Bengal, etc. He is reviewer of many international journals i.e. Energy Conversion and Manage-ment, Renewable and Sustainable Energy Review, International Journal of Renewable Energy Technology, International Agricultural Engineering Journal (IAEJ) and Interna-tional Journal of Renewable Energy Research, etc. He has been on the expert panel of All India Technical Education (AICTE), Department of Science and Technology (DST), Uni- versity Grants Commission (UGC) and many Universities. He has accomplished a research project on Characterization of Forest Based Biomass in Sikkim for Production of Renew-able Energy sponsored by Ministry of Agriculture, Govt. of India through Central Agricul-tural University, Imphal, Manipur. He is handing a research project on Biomass Energy sponsored by Ministry of Petroleum and Natural Gas, Govt. of India, New Delhi. His main areas of expertise are in solar thermal energy, solar photovoltaic energy, biomass energy, wind energy, energy audit, energy conservation and management.