

"Merging of independent MANETs- RCF process model: Check the performance Delay and throughput of server when IP Address conflict Occurs"

Chand Mukesh*, H.L.Mandoria[#]

*Research Scholar, Graphic Era University, Dehradun, India

[#] Prof. CoE&T, PantNagar University, PantNagar, India

mukesh.geu@gmail.com

Abstract

As the number of nodes increases the complexity of MANET [1, 11] increases in various issues. For this reason various approaches has been produced to reduce the complexity such as cluster head technique and dominating set based gateway technique. Another issue is distribution of IP in MANET. There are various approaches is given to assign the IP address but they are not much effective and each and every approach has its limitation. In this paper a conflict free process model is proposed to solve the configuration problem where two or more than two MANET merge and remove the limitation from the above-mentioned approaches .And also the performance of server due IP address conflict is tested with the help of a scenario to solve IP address configuration [2, 4, 8, 13, and 16] problem in mobile adhoc network. Simulation in this thesis shows that duplicates address in a MANET affects the system in various ways.

Key-Words: Mobile Adhoc Networks, IP Address, Private Addressing Scheme

1. Introduction:


Mobile adhoc networks are infrastructureless self-organizing wireless networks. Each node can be mobile and has routing capabilities to be able to forward packets on behalf of other nodes Adhoc networks are typically composed of homogeneous nodes that communicate over wireless links without any central control. Adhoc wireless networks inherit the traditional problem of wireless and mobile communication, such as bandwidth optimization, power control and transmission quality enhancement .In addition topology is highly dynamic & random & very hard to predict. Physical security is limited. Mobile Ad-hoc Network serves as a temporary wireless network in which node changes its IP address with the help of an intelligent auto-configuration protocol [3, 14, 18]. The main role of IP address auto-configuration protocol is to manage the address space .The protocol must be able to allocate a unique network address [4] to un-configured node.


2. Related Work:

There are several scenarios in which a mobile node will change its IP address:

i) Partitions of a network in MANET[7,15]

If some mobile nodes in the MANET move out of the transmission range of the other nodes, the network becomes partitioned. Because these nodes may not be aware of the partition, they may still use the previous allocated addresses. If IP address of a node in one partition is allocated to the new node in the other partition, address conflict occurs when these two partitions become connected. If some mobile nodes in the MANET move out of the transmission range of the other nodes, the network becomes partitioned as in figure 1. Because these nodes may not be aware of the partition, they may still use the previous allocated addresses. If IP address of a node in one partition is allocated to the new node in the other partition, address conflict occurs when these two partitions become connected. Partition of adhoc network is demonstrated as in Fig. 1, 2 and 3.

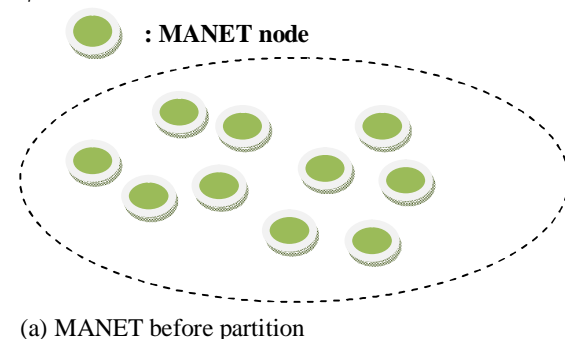

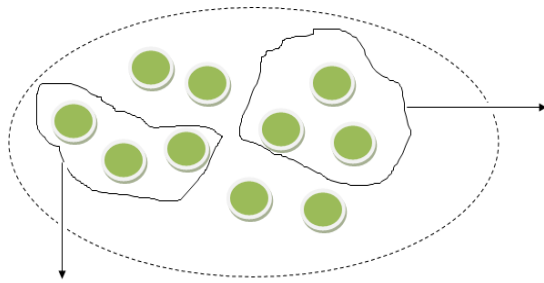

(b) When some of the nodes start moving

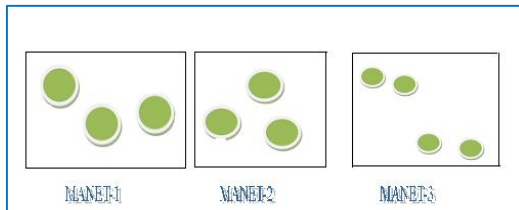


Fig. 2: After partition the network is partitioned Into three different MANET

Due to this partition node in each partitioned MANET carry the same IP address as in before partition. The problem arises when these MANETs are merged than the possibility of collision may occur because of address conflict.

ii) Merger of two independent Mobile networks [7, 15]

The second scenario is that two independent configured MANETs are merged as in Fig. 4. And the MANET before merging is shown in Fig. 1. Because these two networks are auto configured separately, there may be some duplicate addresses in both networks, such as node A in MANET1 and node B in MANET2. Thus one needs to change its addresses due to the merger.

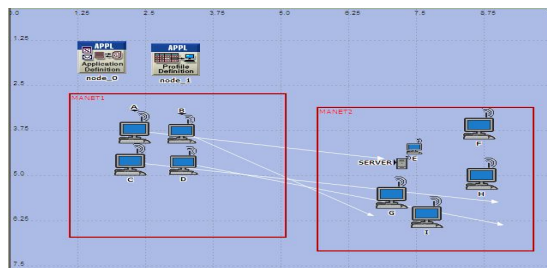


Fig 1: Merger of two networks

3. Problem Formulation

To overcome IP address configuration problem A Frame Work is proposed in the previous paper

[19]. Proposed framework is divided in to three phases, each phase comprising its own level of complexity, and the aim is to achieve the optimum solution from the combined efforts of each phase. The lower phase has various level of complexity such as merger of two networks and partition of one single network into multiple networks, mobility of each node which causes the frequent disconnection of the node. In this paper we are taking the first phase of addressing of different scenarios. In this when two independent networks are merging then this leads the high degree of probability that some nodes are using same IPs, and during merging of two networks it will create the problem of confliction, which must be resolved before merging of the network. To resolve configuration problem a Proposed algorithm is applied to the MANETs (this may also be applied when number of MANETs is increases and hence solve the problem of scalability).

Process Model for IP configuration: This process works when a mobile node(s) finds another node in the network. It sends a signal to initiate the request by using a hello Message and waits until a response comes. The node in this Reconfiguration process model (Fig. 2) works as a network head.

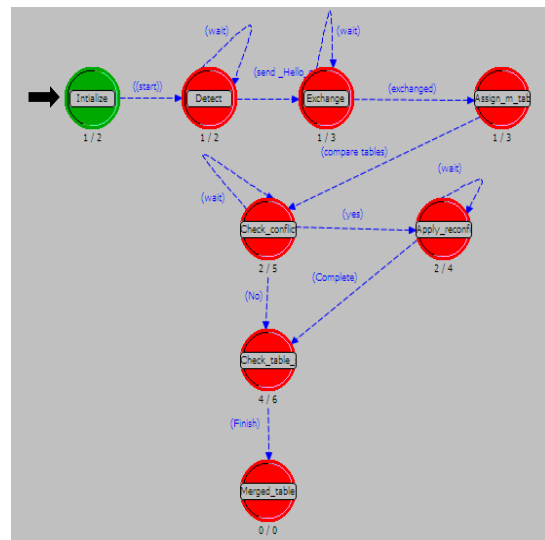


Fig. 2:RCF Process Model 1

Initialize: when a process starts. (Start)

Detect: When a node(s) finds (send_Hello_mesg) another nodes in the network and wait for the response

Exchange: At this state nodes Exchange their routing table and update the latest entries. (exch_routing_tab).After table entries are exchanged table entries are updated at this state and marked as a new table.

Assign_m_table: AT this state the size of the table is checked and if the size of the node1 is greater than the size of node2 then the node1 will be the new head for the merged network.

Merged_table: This state results a merged table or complete table having all the entries in the MANET.

Check_Conflict: In this state table entries are checked and if conflict occurs the reconfiguration process is applied.

Apply_Reconfig_Procedure: Reconfiguration process is applied at this stage.

Check_table_size: In this state if there is no conflict after merging then the size of each table (MANETs) is checked .The network head will be chosen from the largest table size MANET.

St_8: Check table size

Set: Assign a random number to blank entries.

The background details and functions of each node in this process model is explained in the forthcoming paper. For ease of computation we are assuming that in the Scenario there is one network head that is having the central authority for managing the IP addressing, a Process Model is proposed to solve the various cases where IP addresses confliction occurs .The IP address table Tab. 1 describe IP addresses for this simulation. Node from A TO D is assigned to MANET1 and node from E TO I is assigned to MANET2.

Name Of Node	IP Address	Host number
A	192.168.1.1	1
B	192.168.1.2	2
C	192.168.1.3	3
D	192.168.1.4	4
E	192.168.1.5	5
F	192.168.1.6	6
G	192.168.1.7	7
H	192.168.1.8	8
I	192.168.1.9	9

The Remaining Addresses may be assigned to the duplicate node/new node when an address conflict occurs

Tab. 1: IP Address table

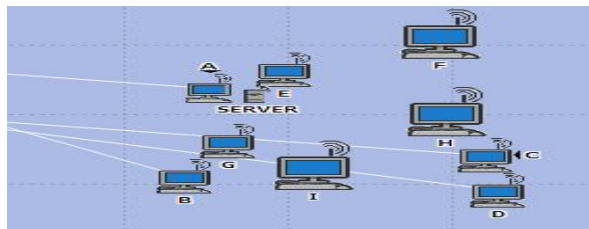
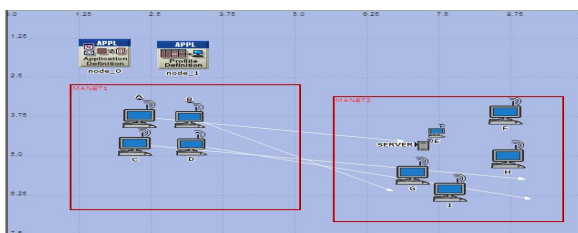


Fig. 4: After merging two MANETs

The table Tab. 2 described all the parameters used

Result Analysis: In this paper two nodes (1, 5) are selected to check the performance of the server. The performance is checked by using the private IP address as follows:

Case 1: When the node A is assigned an IP address 192.168.1.1 and the E is assigned an IP address 192.168.1.5, the load on the server is simulated .In this simulation observation are taken in terms of request (Fig. 5) on the server, Total traffic (Fig. 6) delay. Load, packet dropped, throughput and the number of packet dropped (fig. 7) during simulation as shown in Fig. 5, 6, 7 & 8 and simulation data is shown in table 3.

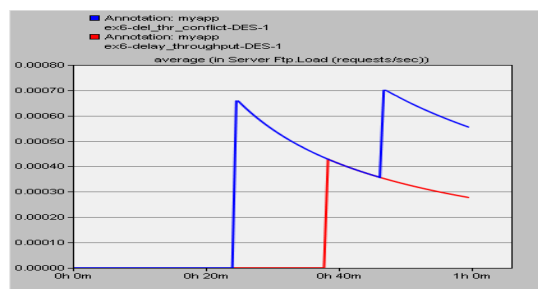


Fig. 5: load (request/sec)

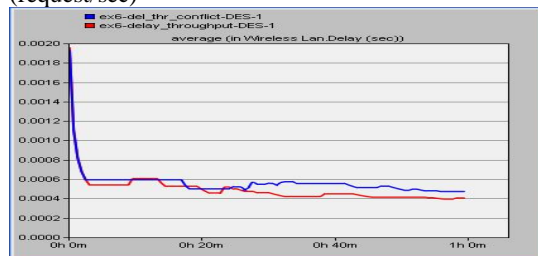
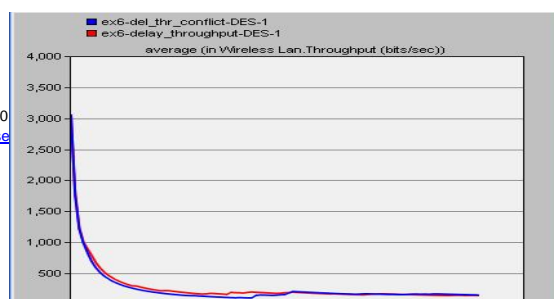


Fig 6: Delay (sec)



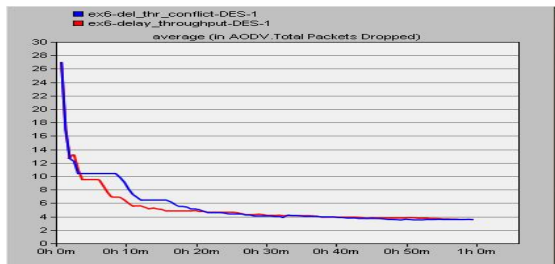


Fig 8: Packet dropped
(packets/sec)

Case 2: When the node A is assigned an IP address 192.168.1.1 and the E is assigned an IP address 192.168.1.1, the load, throughput, delay, packet dropped on the server is simulated as in Fig. 5, 6, 7 and 8. In this simulation observation are taken in terms of request on the server. In this case an IP address conflict occurs because of duplicate address. The server treats the request (coming from A after moving to server and from E) as the same and response both the nodes at once. By comparing dropped packets we have found that in this case the rate of packet dropped is very high and hence information is lost in this case. Throughput, delay and Load also increases when the conflict occurs which results in performance degradation. The simulation data are shown Table 3.

Conclusion & Further Discussion:

In this paper a process model is designed to solve the configuration problem when two or more than two MANETs are merge to assign the conflict free IP address in the network. The information loss and delay in response is tested when IP address conflict occurs with the help of a scenario. Simulation result shows that Load, Throughput, Packet dropped are also affected when address conflict occurs. Further discussion may include the designing of a node model and add the above process side by side as an alternative to DHCP. The aim of the research is to implement all the phases of the framework for IP Address configuration in MANET given in previous paper.

References:

- [1] S. Corson University of Maryland, J. Macker Naval Research Laboratory January 1999
<https://www2.ietf.org/rfc/rfc2501.txt>
- [2] Kilian Weniger and Martina Zitterbart, University Kalsruhe (TH), "Address Auto configuration in Mobile Adhoc Network: Current Approaches and Future Directions", IEEE Network, July/August 2004.
- [3] M. Nazeeruddin, G. Parr, Member, IEEE and B. Scotney, Member, IEEE Fault-tolerant Dynamic Host Auto-configuration Protocol for Heterogeneous MANETs
www.eurasip.org/Proceedings/Ext/IST05/papers/230.pdf
- [4] Taghiloo, M.; Dehghan, M.; Taghiloo, J.; Fazio, M.; Comput. Eng. Dept., Amirkabir Univ. of Technol., Tehran "New Approach for Address Auto-Configuration in MANET Based on Virtual Address Space Mapping (VASM)", ICTTA, 2008. <http://ieeexplore.ieee.org/xpl/mostRecentIss ue.jsp?punumber=4520396>
- [5] Christian Tschudin and Richard Gold "Lightweight Underlay Network Ad-Hoc Routing", April 2002.
<http://www.docs.uu.se/selnet/lunar/>
- [7] Hongbo Zhou and Matt W. Mutka, Lionel M. Ni. "IP Address Handoff in the MANET" IEEE INFOCOM 2004.
- [8] Dongkeun Lee, Jaepil Yoo, Keecheon Kim and Kyunglim Kang "IPv6 Stateless Address Auto-configuration in Mobile Ad-Hoc Network", <http://www.springerlink.com/content/73m5844032323822/>
- [9] D. Senie. RFC-3235 - Network Address Translator (NAT)-Friendly Application Design Guidelines, January 2002.
- [10] Christophe Jelger and Christian Tschudin Technical Report CS-2006-001 University of Basel June 12, 2006. "Private Address Maps (The Disappearing MANET Autoconf Problem)". http://persons.unik.no/paalee/referencing_publications/ref-autoc-jelger-techrep06.pdf.
- [11] IETF MANET Working Group. MANET Charter, 2000.
<http://www.ietf.org/html.charters/manet-charter.html>.
- [12] M.Q.Rafiq, S.R Chauduri, S.Kumar, S.Husain "Deciding the Cluster Size on Behalf of Co- channel Interference Ratio for the Omni Directional Antenna in Mobile Computing" ISTE day conference New Delhi Chapter 31st May & 1st June, 08.
- [13] C. Bernardos and M. Calderon. Internet Draft - Survey of IP address auto configuration mechanisms for MANETs (expired), July 2005.
- [14] P. Engelstad, D. V. Thanh, and G. Egeland. Name Resolution in On-Demand MANETs and over External IP Networks. In *Proceedings of IEEE ICC'03*, May 2003. Anchorage, Alaska.
- [15] P. Krishna, M. Chatterjee, N.H Vaidya, & D.K Pardhan, "A Cluster based Approach for routing in adhoc networks", Proceeding of 2nd USENIX Symposium on Mobile and Location Independent Computing. P.1 1995
- [16] N. Vaidya. "Weak Duplicate Address Detection in Mobile Ad hoc Networks," ACM MobiHoc 2002, Lausanne, Switzerland, June 2002, p 206-216.
- [17] Shenglan Hu, Chris J. Mitchell, "Improving IP address auto configuration security in MANETs using trust modelling,"

Mobile Ad-hoc and Sensor Networks - First International Conference, MSN 2005, p 83-92.

[18] K. Weniger. "Pacman: Passive auto configuration for mobile ad hoc networks," IEEE Journal on Selected Areas in Communications, Special Issue 'Wireless Ad Hoc Networks', March 2005, p 507 - 519.

[19] M.Chand "A PROPOSED ALGORITHM AND A MODEL FOR IP ADDRESS CONFIGURATION IN MANET", ICACC – 2011 (International Conference on Advances in Computing and Communication) NIT Hamirpur, India.

Time (sec)	Packet Dropped(packet/sec)		Delay(sec)		Load(bits/sec)		Throughput(bits/sec)	
	Conf lict	Uni que	Con flict	Uni que	Con flict	Uni que	Conf lict	Uni que
0.0								
36.0								
72.0								
108.0								
144.0								

Table 3: Simulation data

Table 2: Simulation Parameters

S.NO	Name		Description	Value				
1.	Simulation Setup	Mobility Configuration	Used to define Mobility Profile for the mobile nodes	Speed(m/s)		10(const)		
				Start Time(s)		10(const)		
				Pause time(s)		100(const)		
		Application Definition	Used to define different Application used in this scenario for all participating nodes	Type Of application	FTP	IRT(s)		10
						File Size(Bytes)		5000
						Typeof Service	Delay, throughput	
		Profile Definition	Used to specify the common profile on different nodes in the network	Protocol Used	AO DV	Active Route Time Out(s)		3
						Hello Interval(s)		Min(-1),Max(1.1)
						Network Dia.		35
				Addressing Mode		IPV4		
2.	Simulation Parameters			Transmit Power(W)		0.005		
			Packet Reception Power Threshold(W)		-95			
			Simulation Time(hrs)		1			
			No. Of Nodes		9			
			Environment Size		1000*1000(meters)			
			Traffic Type		FTP			