

AUTOMATIC MOTORIZED SCREW JACK TO REDUCED MAN POWER

Kamalakkannan.A¹, Kalaiselvan.P², Isaac.R³, Vijay.V⁴.

¹Assistant Professor, Department of Mechanical Engineering, knowledge institute of Technology, Salem, Tamilnadu, India

²Assistant Professor, Department of Mechanical Engineering, knowledge institute of Technology, Salem, Tamilnadu, India

³Assistant Professor, Department of Mechanical Engineering, knowledge institute of Technology, Salem,

Tamilnadu, India ⁴UG Scholar, Department of Mechanical Engineering, knowledge institute of Technology,

Salem, Tamilnadu, India

vijayvijaymech007@gmail.com

Abstract -Here we are introducing the motorized screw jack. Weight after certain limits cannot be lifted by a person, in such cases we are in need of jack. When it is motorized it becomes more convenient. In order to implement this idea, we have designed and developed a system called motorized jack operating through switch by having full control of the jack, we can easily lift it up and down by using the on/off .this helps to reduce the burden of the worker. The main reason to fabricate the motorized screw jack is to avoid the fatigue of human during lifting of the load. The project is less cost and good efficient for operating.

Keyword(s): Lead screw, screw jack, DC Motor.

1. INTRODUCTION

A screw jack is a portable device consisting of a screw mechanism used to raise or lower the load. The principle on which the screw jack works is similar to that of an inclined plane. There are mainly two types of jacks-hydraulic and mechanical. A hydraulic jack consists of a cylinder and piston mechanism. The movement of the piston rod is used to raise or lower the load. Mechanical jacks can be either hand operated or power driven. Jacks are used frequently in raising cars so that a tire can be changed. A screw jack is commonly used with cars but is also used in many other ways, including industrial machinery and even aeroplanes. They can be short, tall, fat, or thin depending on the amount of pressure they will be under and the space that they need to fit into. The jack is made out of various types of metal, but the screw itself is generally made out of lead. While screw jacks are designed purposely for raising and lowering loads, they are not ideal for side loads, although some can withstand side loads depending on the diameter and size of the lifting screw. Shock loads should also be avoided or minimized. Some screw jacks are built with anti-backlash. The anti-backlash device moderates the axial backlash in the lifting screw and nut assembly to a regulated minimum. A large amount of heat is generated in the screw jack and long lifts can cause serious overheating. To retain the efficiency of the screw jack, it must be used under ambient temperatures, otherwise lubricants must be applied. There is oil lubricants intended to enhance the equipment's capabilities. Apart from proper maintenance, to optimize the capability and usefulness of a screw jack it is imperative to employ it according to its design and manufacturer's instruction. Ensure that you follow the speed, load capacity, temperature recommendation and other relevant factors for application.

2. Literature Review

Screw type mechanical jacks were very common for jeeps and trucks of World War II vintage. For example, the World War II jeeps (Willys MB and Ford GPW) were issued the "Jack, Automobile, Screw type, Capacity 1 1/2 ton", Ordnance part number 41-J-66. This jacks, and similar jacks for trucks, were activated by using the lug wrench as a handle for the jack's ratchet action to of the jack. The 41-J-66 jack was carried in the jeep's tool compartment. Screw type jack's continued in use for small capacity requirements due to low cost of production raise or lower it. A control tab is marked up/down and its position determines the direction of movement and almost no maintenance. The virtues of using a screw as a machine, essentially an inclined plane wound round a cylinder, was first demonstrated by Archimedes in 200BC with his device used for pumping water. There is evidence of the use of screws in the Ancient Roman world but it was the great Leonardo da Vinci, in the late 1400s, who first demonstrated the use of a screw jack for lifting loads. Leonardo's design used a threaded worm gear, supported on bearings, that rotated by the turning of a worm shaft to drive a lifting screw to move the load - instantly recognizable as the principle we use today.

We can't be sure of the intended application of his invention, but it seems to have been relegated to the history books, along with the helicopter and tank, for almost four centuries. It is not until the late 1800s that we have evidence of the product being developed further. With the industrial revolution of the late 18th and 19th centuries came the first use of screws in machine tools, via English inventors such as John Wilkinson and Henry Maudsley The most notable inventor in mechanical engineering from the early 1800s was undoubtedly the mechanical genius Joseph Whitworth, who recognised the need for precision had become as important in industry as the provision of power.

While he would eventually have over 50 British patents with titles ranging from knitting machines to rifles, it was Whitworth's work on screw cutting machines, accurate measuring instruments and standards covering the angle and pitch of screw threads that would most influence our industry today. Whitworth's tools had become internationally famous for their precision and quality and dominated the market from the 1850s. Inspired young engineers began to put Whitworth's machine tools to new uses. During the early 1880s in Coaticook, a small town near Quebec, a 24- year-old inventor named Frank Henry Sleeper designed a lifting jack. Like da Vinci's jack, it was a technological innovation because it was based on the principle of the ball bearing for supporting a load and transferred rotary motion, through gearing and a screw, into linear motion for moving the load. The device was efficient, reliable and easy to operate. It was used in the construction of bridges, but mostly by the railroad industry, where it was able to lift locomotives and railway cars. Local Coaticook industrialist, Arthur Osmore Norton, spotted the potential for Sleeper's design and in 1886 hired the young man and purchased the patent. The Norton" jack was born. Over the coming years the famous "Norton" jacks were manufactured at plants in Boston, Coaticook and Moline, Illinois. Meanwhile, in Alleghany County near Pittsburgh in 1883, an enterprising Mississippi river boat captain named Josiah Barrett had an idea for a ratchet jack that would pull barges together to form a „tow". The idea was based on the familiar lever and fulcrum principle and he needed someone to manufacture it. That person was Samuel Duff, proprietor of a local machine shop, together, they created the Duff Manufacturing Company, which by 1890 had developed new applications for the original "Barrett Jack" and extended the product line to seven models in varying capacities. Over the next 30 years the Duff Manufacturing Company became the largest manufacturer of lifting jacks in the world, developing many new types of jack for various applications including its own version of the ball bearing screw jack. It was only natural that in 1928, The Duff Manufacturing Company Inc. merged with A.O. Norton to create the Duff-Norton Manufacturing Company. Both companies had offered manually operated screw jacks but the first new product manufactured under the joint venture was the air motor-operated power jack that appeared in 1929. With the aid of the relatively new portable compressor technology, users now could move and position loads without manual effort. The jack, used predominantly in the railway industry, incorporated an air motor manufactured by The Chicago Pneumatic Tool

Company. There was clearly potential for using this technology for other applications and only 10 years later, in 1940, the first worm gear screw jack, that is instantly recognizable today, was offered by Duff-Norton, for adjusting the heights of truck loading platforms and mill tables. With the ability to be used individually or linked mechanically and driven by either air or electric motors or even manually, the first model had a lifting capacity of 10 tons with raises of 2" or 4". Since then the product has evolved to push, pull, lift, lower and position loads of anything from a few kilos to hundreds of tonnes. One of the biggest single screw jacks made to date is a special Power Jacks E-Series unit that is rated for 350 tonnes –even in earthquake conditions for the nuclear industry. More recent developments have concentrated on improved efficiency and durability, resulting in changes in both lead screw and gearbox design options for screw jacks. A screw jack that has a built-in motor is now referred to as a linear actuator but is essentially still a screw jack. Today, screw jacks can be linked mechanically or electronically and with them advances in motion-control, loads can be positioned to within microns. Improvements in gear technology together with the addition of precision ball screws and roller screws mean the applications for screw jacks today are endless and a real alternative to hydraulics in terms of duty cycles and speed at a time when industry demands cleaner, quieter and more reliable solutions. Screws Application is used in the elevation of vehicles or objects. The operation of the screw jack is such that it comprises a handle for driving a bolt element (Lead Screw) manually so as to adjust the height of the Jack to elevate a vehicle or the object. The operation of the jack manually makes it difficult for most women and the elderly to operate since much effort is needed to drive the screw jack which results in low linear speed and time consuming. These presently available jacks further require the operator to remain in prolonged bent or squatting position to operate the jack. Doing work in a bent or squatting position for a period of time is not ergonomic to human body. It will give back ache problem in due of time. Suppose car jacks must be easy to use by women or whoever had problem with the tyres along the road. The objective of this paper is therefore to modify the existing design of car jack by incorporating an electric motor into the existing screw jack to make the operation easier, safer faster and more reliable.

3. METHODOLOGY

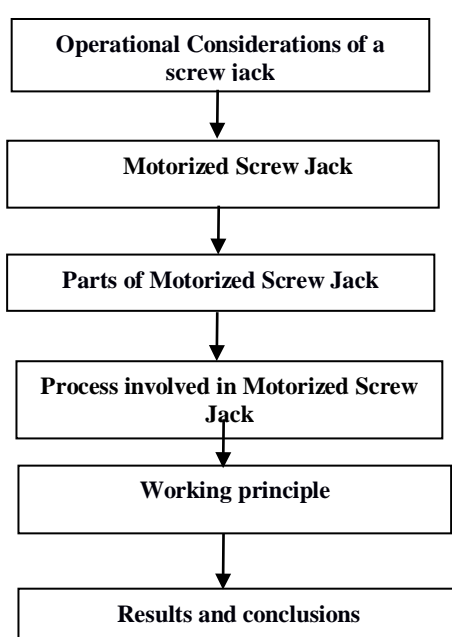


Fig 1: Methodology

3.1 Operational Considerations of a screw jack.

Maintain low surface contact pressure

Increasing the screw size and nut size will reduce thread contact pressure for the same working load. The higher the unit pressure and the higher the surface speed, the more rapid the wear will be.

Maintain low surface speed

Increasing the screw head will reduce the surface speed for the same linear speed.

Keep the mating surfaces well lubricated

The better the lubrication, the longer is the service life. Grease fittings or other lubrication means must be provided for the power screw and nut.

Keep the mating surfaces clean

Dirt can easily embed itself in the soft nut material. It will act as a file and abrade the mating screw surface. The soft nut material backs away during contact leaving the hard dirt particles to scrap away the mating screw material.


Keep heat away

When the mating surfaces heat up, they become much softer and are more easily worn away. Means to remove the heat such as limited duty cycles or heat sinks must be provided so that rapid wear of over-heated materials can be avoided.

3.2 Motorized Screw Jack

Our survey in the regard in several automobile garages, revealed the facts that mostly some difficult methods were adopted in lifting the vehicles for reconditioning. Now the research paper has mainly concentrated on this difficulty, and hence a suitable device has been designed, such that the vehicle can be lifted from the floor land without application of any impact force. The fabrication part of it has been considered with almost case for its simplicity and economy, such that this can be accommodated as one of the essential tools on automobile garages.

4.1 DESIGN OF MOTORIZED JACK

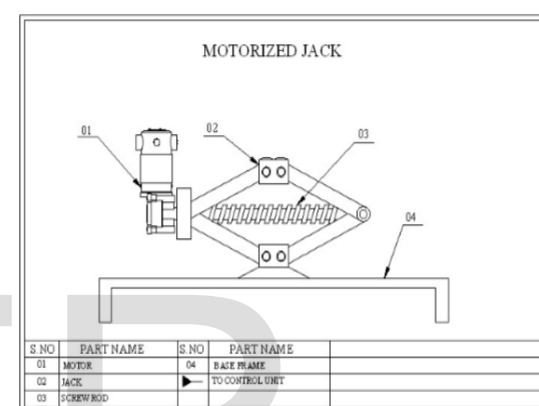

The motorized screw jack has been developed to cater to the needs of small and medium automobile garages, which are normally man powered with minimum skilled labour. In most of the garages the vehicles are lifted by using screw jack. This needs high man power and skilled labour. In order to avoid all such disadvantages, the motorized jack has been designed in such a way that it can be used to lift the vehicle very smoothly without any impact force. The operation is made simple so that even unskilled labour can use it with ease. The D.C. motor is coupled with the screw jack by gear arrangement The screw jack shaft's rotation depends upon the rotation of D.C motor. This is a simple type of automation project. This is an era of automation where it is broadly defined as replacement of manual effort by mechanical power in all degrees of automation. The operation remains to be an essential part of the system although with changing demands on physical input, the degree of mechanization is increased.

3.3 Parts of Motorized Screw Jack.

The main parts of the motorized screw jack are as follows:

D.C. motor:

An electric motor is a machine which converts electrical energy to mechanical energy. Its action is based on the principle that when a current-carrying conductor is placed in a magnetic field, it experiences a magnetic force whose direction is given by Fleming's left hand rule.

Fleming's Left Hand Rule.

Keep the force finger, middle finger and thumb of the left hand mutually perpendicular to one another. If the fore finger indicates the direction of magnetic field and middle finger indicates the direction of current in the conductor, then the thumb indicates the direction of the motion of conductor.

When a motor is in operation, it develops torque. This torque can produce mechanical rotation. DC motors are also like generators classified into shunt wound or series wound or compound wound motors.

Principle of Operation of Dc Motor

A simplified model of such a motor is shown in figure. The conductors are wound over a soft iron core. DC supply is given to the field poles for producing flux. The conductors are connected to the DC supply through brushes. A simple 2-pole DC electric motor has 6 parts, as shown in the diagram below.

- An armature or rotor
- A commutator
- Brushes
- An axle
- A field magnet
- A DC power supply of some sort

An electric motor is all about magnets and magnetism:

A motor uses magnets to create motion. Opposites attract and likes repel. So if there are 2 bar magnets with their ends marked north and south, then the North end of one magnet will attract the South end of the other. On the other hand, the North end of one magnet will repel the North end of the other (and similarly south will repel south). Inside an electric motor these attracting and repelling forces create rotational motion..

Universal Joint

A universal joint is a positive, mechanical connection between rotating shafts, which are usually not parallel, but intersecting. They are used to transmit motion, power, or both. The simplest and most common type is called the Cardan joint or Hooke joint. It is shown in It consists of two yokes, one on each shaft, connected by a cross-shaped intermediate member called the spider. The angle between the two shafts is called the operating angle. It is generally, but not necessarily, constant during operation. Good design practice calls for low operating angles, often less than 25°, depending on the application. Independent of this guideline ne, mechanical interference in the construction of Cardan joints limits the operating angle to a maximum (often about 37½°), depending on its proportions. Typical applications of universal joints include aircraft, appliances, control mechanisms, electronics, Instrumentation, medical and optical devices, ordnance, radio, sewing machines, textile machinery and tool drives. Universal joints are available in steel or in thermoplastic body members. Universal joints made of steel have maximum load-carrying capacity for a given size. Universal joints with thermoplastic body members are used in light industrial applications in which their self-lubricating feature, light weight, negligible backlash, corrosion resistance and capability for high-speed operation are significant advantages.

3.4 Process involved

Fabrication and assembly motorized screw jack of is as follows:

Making of coupling

We have cut the blank of mild steel rod having diameter 60 mm and length 70mm by using power hacksaw machine from the given rod. Turning operation of MS rod has done on lathe machine which reduces the diameter up to 50 mm. Machining operation has done on CNC milling machine for making slot. Drilling operation has done on drilling machine for making hole of 10mm diameter for fixing bolt and nut. Surface finishing operation has done by grinding machine and filing.

Supporting component

Supporting component has used for fixing the D.C. motor. It has cut from the channel by using power hacksaw machine in required size. Drilling operation has done on drilling machine for fixing bolt. Finishing operation has done on bench vice using file.

Base plate

Base plate is made from mild steel plate. It has used for fixing all components of motorized lifting jack. Base plate has cut from mild steel plate of bigger size in to required size of 120mmx100mm. by using gas cutter machine. Surface

finishing operation has done by using grinding machine. There are 4 holes made in the base plate by using drill bit of 10mm diameter on drilling machine.

D.C. Motor

A DC Motor of 12 Volt with a Current of 14 Amps is to produce the movement of the machine. The motor is internal geared one. So it is strong enough to give the required torque. It can give two different speeds in one direction and two different speeds in the opposite direction.

Final finishing work

First power screw jack of 2 ton capacity has fixed on the base plate using bolt and nut. Power screw jack has connected to one end of first coupling by using nut bolt. First coupling has connected to one end of universal joint with the help of bolt and nut.

Testing

After assembly of all components on base plate, the Motorized Screw Jack was made and tested to lift the car. But the battery capacity is not enough to run the motor. So it has removed. Test was conducted by using main power supply instead of battery.

3.5 Working principle.

The jack's screw rod is fixed to the motor shaft, the motor gets power from the power source. The on/off switch keys are interface with control circuit with power supply. And we are connecting the dc motor with the mechanical model for the up and down movement when we press the ON & OFF switch. It will send power to motor to rotate in right direction & it will rotate in opposite direction respectively. Using this equipment we can easily access the lifting of load in various purpose of our need. By alternating the motor with higher torque the jack can lift heavy load easily.

3.6 Results and conclusions

The project carried out by us made an impressing task in the field of automobile and automobile workshops. It is very usefully for the workers to work in the automobile workshop are in the service station. This project has also reduced the cost involved in the concern. Project has been designed to perform the entire requirement task which has also provided.

REFERENCES

[1] International Journal of Advanced Research (2015), Volume 3, Issue 3, 1279-1282, RESEARCH ARTICLE REMOTE CONTROLLED SCISSOR JACK TO LIFT THE VEHICLE Journal homepage:<http://www.journalijar.com>.

[2]International Journal of Scientific Engineering and Applied Science (IJSEAS) - Volume-1, Issue-3, June 2015 , ISSN: 2395-3470 ANALYSIS AND FABRICATION OF REMOTE CONTROL LIFTING JACK. Journal homepage:<http://www.ijseas.com> .

[3]TJ.Prabhu "Design of transmission elements" Mani offset Chennai.1999.

[4]Faculty of Mechanical Engineering PSG College of technology "Design data" DPV Printers Coimbatore.

[5] Dr.sandhu singh "Machine design"Khanna Publishers,Delhi.1997.

IJSER