

An optimization and lifetime improvement using AI in VGDR Protocol for mobile sink WSN

Maninder Singh, Lecturer, Dept. of ECE, Haryana Engineering College, Jagadhri
Ricky Devi, M.Tech, Dept. of ECE, Haryana Engineering College, Jagadhri

ABSTRACT: In wireless sensor networks, emergence of sink mobility has been considered as a good strategy to maintain the nodes energy dissipation. According to previous approaches the Dynamic Routes Adjustment (VGDR) plan that acquires slightest correspondence cost while keeping up almost ideal courses to the most recent area of the portable sink. The proposed plan parcels the sensor field into a virtual matrix and develops a virtual spine structure included the cell header hubs. A versatile sink while moving around the sensor field continues changing its area and associates with the nearest marginal cell-header for information accumulation. Utilizing a set of correspondence guidelines, limited number of the cellheaders participates in the courses recreation prepares along these lines diminishing the general correspondence cost. The proposed approach is to minimize energy utilization and maximize network lifetime by implementing optimization technique Biogeography Based Optimization (BBO) as selection algorithm for route adjustment. The simulation results represented improved network lifetime of existed VGDR comparison with VGDR-BBO using ns2 as a simulation tool.

General Terms: Virtual Grid, Route Reconstruction, Data Dissemination, Dynamic network topology

Keywords: Wireless Sensor Network, Life time, Throughput, Mobile sink

1. INTRODUCTION

Wireless Sensor Network (WSN) – a self-composed system of modest registering and specialized gadgets (sensor nodes) has been generally utilized as a part of a few un-went to and perilous situations. In a commonplace organization of WSN, hubs are battery worked where they agreeably screen and report some wonder of enthusiasm to a focal hub called sink or base-station for further handling and examination. Conventional static hubs arrangement where hubs display n-to-1 correspondence in reporting their watched information to a solitary static sink, offers ascend to vitality opening wonder in the region of sink. Sink versatility presented in [1] not just adjusts the hub's vitality scattering can segregated system fragments in dangerous zones [2].

Likewise, a couple application circumstances regularly network. The goal behind such virtual structure construction is to minimize the routes re-adjustment to reduce the numbers

require sink mobility in the sensor field [3] e.g., in a flood organization structure, a rescuer outfitted with a PDA can move around the unsafe circumstance to scan for any survivor. So additionally, in a battle zone environment, a chairman can procure constant information about any intrusion of enemies, size of ambush, suspicious activities thus on through field sensors while moving. In an Intelligent Transport System (ITS), sensor centroid sent at various purposes of interest - crossing points, auto parks, zones vulnerable to falling rocks, can give early notification to drivers (adaptable sink) well before their physical technique. Mishandling the sink's flexibility draws out the framework lifetime thusly moderating imperativeness hole issue; regardless, it brings new challenges for the data diffusing procedure.

Exploiting the sink's mobility helps to prolong the network lifetime thereby alleviating energy-hole problem; however, it brings new challenges for the data dissemination process. Unlike static sink scenarios, the network topology becomes dynamic as the sink keeps on changing its location [4]. To cope with the dynamic network topology, nodes need to keep track of the latest location of the mobile sink for efficient data delivery. Some data dissemination protocols e.g., Directed Diffusion [5], where the periodic flooding takes place leads to more collision and retransmission. Taking into consideration the scarce energy resource of nodes, frequent propagation of sink's mobility updates should be avoided as it greatly undermines the energy conservation goal. In this regard, to enable sensor nodes to maintain fresh routes towards the mobile sink while incurring minimal communication cost, overlaying based virtual infrastructure over the physical network is considered as an efficient approach [6]. In the virtual infrastructure based data dissemination schemes, only a set of designated nodes scattered in the sensor field are responsible to keep track of sink's location. Such designated nodes gather the observed data from the nodes in their vicinity during the absence of the sink and then proactively or reactively report data to the mobile sink.

In this paper, a novel scheme called Virtual Grid based Dynamic Routes Adjustment (VGDR) is proposed for periodic data collection from WSN [15]. It aims to optimize the trade-off between nodes energy consumption and data delivery performance using a single mobile sink in WSN. The proposed scheme enables sensor nodes to maintain nearly optimal routes to the latest location of a mobile sink with minimal network overhead. It partitions the sensor field into a virtual grid of K equal sized cells and constructs a virtual backbone network comprised of all the cell-headers. The nodes near to the centre of cell header will be

responsible to collect the data and deliver to mobile sink using the backbone network. cost due to sink mobility so that the observed data is delivered to the mobile sink in an energy efficient way.

The mobile sink moves randomly along the periphery of the sensor field in counter clockwise and communicates with the border cell-headers for data collection. The routes re-adjustment process is governed by a set of rules to dynamically cope with the sink mobility. For the route re-adjustment the biogeography based optimization approach is included with VGDR for longer lifetime of network.

The rest of this paper is organized as follows: Details about the related work encompassing the various approaches in literature that deal with data delivery to a mobile sink in WSN presented in Section 2. Section 3 presents VGDR scheme with the approach BBO in detail. To evaluate the performance of new VGDR-BBO scheme, simulation setup and results are presented in Section 4. Finally, in Section 5 conclusion and future works of the research paper described.

2. RELATED WORK

Several virtual infrastructure based data dissemination protocols have been proposed for mobile sink based WSN in the last decade. Based on the mobility pattern exhibited by the sink in the sensor field, the data collection or dissemination schemes can be classified into controlled and uncontrolled sink mobility schemes. This paper considers the uncontrolled sink mobility environments and in the following lines, we briefly describe the related works in this context including their methodology and the relative strengths and weaknesses.

For mobile sink based wireless sensor network virtual infrastructure strategy are most efficient. Virtual infrastructure can achieve better scalability and energy efficiency [2]. Virtual infrastructure can be classified in to two types such as rendezvous based and backbone based. Backbone based approach is a kind of self organizing scheme but in rendezvous structure a localized rendezvous area defined within the sensor field [2]. In the present scenario lots of rendezvous or backbone based virtual infrastructure routing schemes are available. Virtual Grid Based Dynamic Routes Adjustment Scheme (VGDR) and Virtual Circle Combined Straight Routing (VCCSR) are two data dissemination protocol used in a mobile sink based wireless sensor network.

Chen et al. [7] presented a converge-cast tree algorithm called Virtual Circle Combined Straight Routing (VCCSR) that constructs a virtual structure comprised of virtual circles and straight lines. A set of nodes are set as cluster heads along these virtual circles and straight lines. Together the set of cluster-heads form a virtual backbone network. The sink circulates the sensor field and maintains communication with the border cluster-heads for data collection. The clusterheads in VCCSR follow a set of communication rules to minimize the routes re-adjustment cost in propagating the sink's latest location information. VCCSR scheme although reduces the routes reconstruction cost in handling the sink mobility, however, the cluster-head at the centre of the sensor field being the focal point in routes re-adjustment process, depletes its energy much earlier.

Oh et al. suggested a scheme based on data dissemination

known as Backbone-based Virtual Infrastructure (BVI) in [8], which makes use of single-level multi-hop clustering and points to reduce the total number of clusters.

It employs HEED [9] for clustering in which main concern is given to residual energy level of nodes for electing the CH nodes. The multi-hop clustering is a fine approach to reduce the number of clusters, on the other hand, the root node which is the focus in routes adjustments generates early energy depletion which reduces the lifetime of network.

The approach has been proposed in Line-Based Data Dissemination (LBDD) [10] that makes a vertical line by dividing the sensor field into two equal sized blocks.

Quadtree-based Data Dissemination (QBDD) scheme was suggested by Mir and Ko in [11], a node upon detecting an event calculates a set of rendezvous points (RPs) by successively partitioning the physical network space into four quadrants of uniform sizes. After partitioning the network, QDD routes the observed data to those nodes which are close to the centroid of each partition. The mobile sink disseminates the query packet using the same strategy by querying the node at closest RP first, followed by the subsequent RP nodes till it reaches the required data reportit also results in early energy depletion of nodes. This method also reduces the overall network lifetime.

A further approach called Virtual grid based Two-Tier Data Dissemination (TTDD) in [12] where forms a uniform per source node virtual grid structure covering the complete sensor field. TTDD prevents the flooding of the sink's topological updates but having the disadvantage of per source node virtual grid construction that reduces the network lifetime.

Abdul Waheed Khan, Abdul Hanan Abdullah Mohammad Abdur Razzaque, and Javed Iqbal Bangash [15] Proposed VGDR Scheme of virtual infrastructure based data dissemination, that cause least communication cost and also maintains nearly optimal routes to the latest location of the mobile sink. The VGDR scheme partitions the sensor field into a virtual grid and constructs a virtual backbone structure comprised of the cellheader nodes. A mobile sink when moves around the sensor field keep on changes its location and interacts with the nearest border-line cell-header for data collection. Using a set of communication rules, only a limited number of the cellheaders take part in route reconstruction process thereby reducing the overall communication cost.

Biogeography-Based Optimization (BBO) [16] was proposed by Simon, D. BBO is a new evolution algorithm developed for the global optimization. It is inspired by the immigration and emigration of species between islands (or habitats) in search of more compatible islands. In proposed work, the Biogeography-Based Optimization algorithm [17] is used for the dynamic deployment problem of WSNs. reason for using the optimization algorithm is to maximize the coverage rate of the network.

The mobile sink node comprises the subsequent data dissemination a challenging task due to limited resources containing sensor nodes. The infrequent dissemination results in poor data delivery performance lacking in using optimal routes. So, in this research work to optimize the trade-off between network's life time and data driven performance virtual grid based dissemination is proposed for event driven scenario.

3. VGDRA-BBO SCHEME

The mobile sink node comprises the subsequent data due to limited resources containing sensor which was developed by

The VGDRA scheme constructs the virtual grid structure by limited resources containing sensor which was developed by

IJSER

setup their data delivery routes in accordance to latest location of the mobile sink. Adjacent cell-headers communicate with each other via gateway nodes. The set of cell-headers nodes together with the gateway nodes constructs the virtual backbone structure. The nodes which will participate in packet delivery will remain in active state and others will be sleep mode.




Fig.1 Shows network partitioning into various uniform sized cells for $N = 50$.

In existing VGDR no specific AI or Genetic based routing scheme is implemented so we take the BBO Scheme to check the lifetime and throughput effect on existing system.

3.1 Biogeography-Based Optimization

As the name suggests, BBO is a population based global optimization technique developed on the basis of the science of biogeography i.e. study of the distribution of animals and plants among different habitats over time and space [17]. The reason behind using BBO is that:

- BBO has a way of sharing information between solutions.
- BBO solutions survive forever.

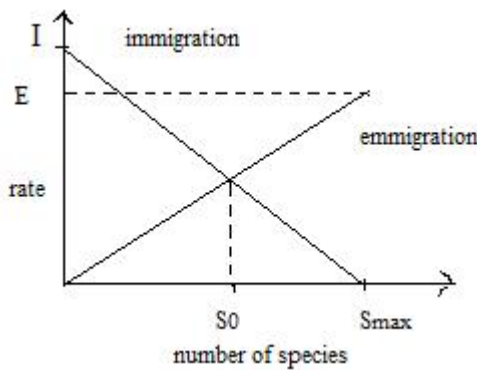


Fig.2 Linear migration relationship of an island. The equilibrium number of species is S_0 , where the immigration and emigration rates are identical.

Let's consider that there is a problem and a set of solutions which are represented in the form of vectors. Now suppose there is a way to assessing the accurate solutions. Accurate solutions are those having high value of ISI, and poor solutions are belongs to low ISI. Note that ISI is the same as

“fitness” in other population based optimization algorithms. In biogeography, species migrate between islands. However, in BBO[20] solution features (SIVs) migrates between islands. The migration probabilities are based on a curve similar to that shown in Figure 2, but considering simplicity assume that all solutions (islands) have similar migration curves with $E = I$. In this approach, for each feature in each solution, we use the immigration curve to probabilistically decide whether or not to immigrate. If immigration is selected for a given solution feature, then the emigrating island is selected probabilistically. The notation $y_k(s)$ is used to denote the s_{th} feature of the k_{th} population member represented as in figure 3. Migration and mutation of the entire population take place before any of the solutions are replaced in the population, which requires the use of the temporary population vector w as shown in BBO Algorithm.

BBO Algorithm:

Let y denotes the population of solution

$w \leftarrow y$ (w is a temporary population vector)

For each island w_k

For each SIV s

Use λ_k to probabilistically decide whether to immigrate to $w_k(s)$

If immigrating then

Use μ to probabilistically select the emigrating island y_j

$w_k(s) \leftarrow y_j(s)$

end if

Probabilistically decide whether to mutate $w_k(s)$

next SIV

next island $y \leftarrow w$

Fig.3 The above algorithm is one generation of the partial immigration-based BBO algorithm. Y is the entire population of solutions, y_k is the k_{th} solution, and $y_k(s)$ is the s_{th} feature of y_k .

3.2 Proposed Methodology

Methodology used in VGDR-BBO for energy enhancement is described in the following steps:

- Step1: Define the area where the sensor network to be created.
- Step 2: Initializing WSN parameter.
- Step 3: Deploying No. of Nodes in the network.
- Step 4: Implementing existing VGDR Protocol.
- Step 5: Initialize BBO parameter for routing.
- Step 6: Defining Migration and Emigration rate.
- Step 7: Routing update with each round.

Step 8: Checking Lifetime and Data Consumption.
Step 9: Comparison with previous VGDR Scheme.
The various parameters in support of WSN network are

Sr. No.	Parameter	Value
1	No.of nodes	50
2	Environment Size	1300*1000
3	Packet Queue Size	300
4	Eelect	50nJ
5	No of Cell Heads	4

Table 1

4. SIMULATION AND RESULTS

Here, the simulation results are shown using NS-2, taken 50 no. of nodes for the visualisation. The nodes are randomly deployed in a sensor field area of 1300×1000 dimension. A mobile sink moves around the sensor field counter clockwise and periodically broadcasts the packets. This paper uses the ns2 simulator to evaluate the existing work of VGDR compared with VGDR-BBO.

4.1 Simulation result for Network Lifetime

The network lifetime is defined as the time elapsed since the nodes deployment till the first node dies due to energy depletion. From experiments, it is estimated that the network lifetime of proposed scheme is better than existing VGDR scheme in terms of the number of rounds of the mobile sink around the sensor field till the first node in the network dies due to energy depletion. In Figure 4, the proposed VGDR-BBO scheme lifetime and existed VGDR scheme comparisons are presented as dead nodes to lifetime in hours at different network sizes.



Fig 4: Proposed VGDR-BBO scheme Lifetime comparison with existing VGDR

4.2 Simulation Result for Throughput:

The network throughput is the rate of successful packet delivery over the communication channel. Throughput is measured in bits per second. As presented the comparison between existed VGDR scheme and proposed VGDR-BBO scheme in Figure 5 in terms of different iterations. $Throughput = (Size\ of\ the\ packet / Transmission\ time)$

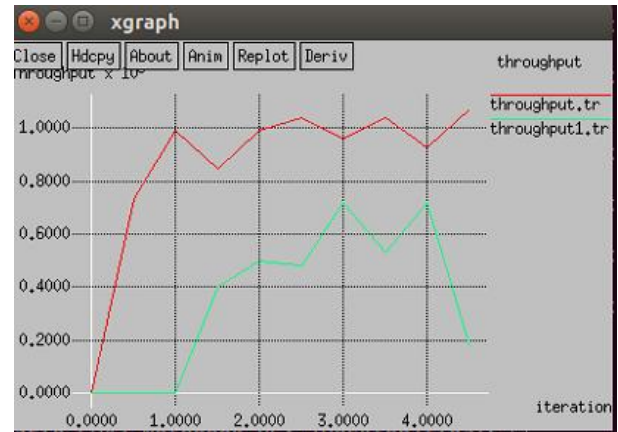


Fig 5: The VGDR throughput in comparison with proposed VGDR-BBO scheme

The comparison between the results of existing VGDR and proposed work on the existing scheme results are elaborated further in the Table 3 .

Table 3 Comparison between Proposed and Existing Schemes

Parameters	Proposed Scheme	Existing Scheme(VGDR)
No.of Nodes	50	50
Lifetime	$1.5 * 10^4$ hours	$1.2 * 10^4$ hours
Throughput	Less	More
Efficiency	More	Less

As the less number of nodes participates in route optimization of our proposed scheme, the less time required for transmission in iterations as shown in throughput comparison see Figure 5. Due to this reason the nodes which yet participated in routing will be considered in next iteration for transmission. This is how the efficiency of the proposed network can be considered more.

5. CONCLUSION

In this paper, work is considered on the improvement in life time of Virtual Grid based Dynamic Routes Adjustment (VGDR) scheme maintaining nearly optimal routes to the latest location of the mobile sink. In terms of nodes energy consumption, the simulation results show the various factor improving existing VGDR scheme for the sensor field. In this work the routing is taken into account by adapting BBO strategy to create grid and data dissemination balancing the energy consumption in response to longer lifetime of WSN.

In Future work, multiple mobile sinks can be considered with different speeds to check efficiency and quality of service of the network by using the proposed scheme.

6. REFERENCES

- [1] R. C. Shah, S. Roy, S. Jain, and W. Brunette, "Data MULEs: Modeling and analysis of a three-tier architecture for sparse sensor networks," in *Ad Hoc Netw.*, vol. 1. 2003, pp. 215–233.
- [2] S. R. Gandham, M. Dawande, R. Prakash, and S. Venkatesan, "Energy efficient schemes for wireless sensor networks with multiple mobile base stations," in *Proc. IEEE Global Telecommun. Conf. (GLOBECOM)*, vol. 1. Dec. 2003, pp. 377–381.
- [3] W. Khan, A. H. Abdullah, M. H. Anisi, and J. I. Bangash, "A comprehensive study of data collection schemes using mobile sinks in wireless sensor networks," *Sensors*, vol. 14, no. 2, pp. 2510–2548, 2014.
- [4] M. Di Francesco, S. K. Das, and G. Anastasi, "Data collection in wireless sensor networks with mobile elements," *ACM Trans. Sensor Netw.*, vol. 8, no. 1, pp. 1–31, Aug. 2011.
- [5] Chalermek, R. Govindan, and D. Estrin, "Directed diffusion: A scalable and robust communication paradigm for sensor networks," in *Proc. ACM SIGMOBILE Int. Conf. Mobile Comput. Netw. (MOBICOM)*, 2000, pp. 56–67.
- [6] E. B. Hamida and G. Chelius, "Strategies for data dissemination to mobile sinks in wireless sensor networks," *IEEE Wireless Commun.*, vol. 15, no. 6, pp. 31–37, Dec. 2008.
- [7] T.-S. Chen, H.-W. Tsai, Y.-H. Chang, and T.-C. Chen, "Geographic convergecast using mobile sink in wireless sensor networks," *Comput. Commun.*, vol. 36, no. 4, pp. 445–458, Feb. 2013.
- [8] S. Oh, E. Lee, S. Park, J. Jung, and S.-H. Kim, "Communication scheme to support sink mobility in multi-hop clustered wireless sensor networks," in *Proc. 24th IEEE Int. Conf. Adv. Inf. Netw. Appl.*, Apr. 2010, pp. 866–872.
- [9] O. Younis and S. Fahmy, "HEED: A hybrid, energy-efficient, distributed clustering approach for ad hoc sensor networks," *IEEE Trans. Mobile Comput.*, vol. 3, no. 4, pp. 366–379, Oct. 2004.
- [10] S. R. Gandham, M. Dawande, R. Prakash, and S. Venkatesan, "Energy efficient schemes for wireless sensor networks with multiple mobile base stations," in *Proc. IEEE Global Telecommun. Conf. (GLOBECOM)*, vol. 1. Dec. 2003, pp. 377–381.
- [11] W. Khan, A. H. Abdullah, M. H. Anisi, and J. I. Bangash, "A comprehensive study of data collection schemes using mobile sinks in wireless sensor networks," *Sensors*, vol. 14, no. 2, pp. 2510–2548, 2014.
- [12] M. Di Francesco, S. K. Das, and G. Anastasi, "Data collection in wireless sensor networks with mobile elements," *ACM Trans. Sensor Netw.*, vol. 8, no. 1, pp. 1–31, Aug. 2011.
- [13] Chalermek, R. Govindan, and D. Estrin, "Directed diffusion: A scalable and robust communication paradigm for sensor networks," in *Proc. ACM SIGMOBILE Int. Conf. Mobile Comput. Netw. (MOBICOM)*, 2000, pp. 56–67.
- [14] E. B. Hamida and G. Chelius, "Strategies for data dissemination to mobile sinks in wireless sensor networks," *IEEE Wireless Commun.*, vol. 15, no. 6, pp. 31–37, Dec. 2008.
- [15] T.-S. Chen, H.-W. Tsai, Y.-H. Chang, and T.-C. Chen, "Geographic convergecast using mobile sink in wireless sensor networks," *Comput. Commun.*, vol. 36, no. 4, pp. 445–458, Feb. 2013.
- [16] S. Oh, E. Lee, S. Park, J. Jung, and S.-H. Kim, "Communication scheme to support sink mobility in multi-hop clustered wireless sensor networks," in *Proc. 24th IEEE Int. Conf. Adv. Inf. Netw. Appl.*, Apr. 2010, pp. 866–872.

IJSER