

# Conceptual Design and Prototype of Smart Calling System Research

K.Karmegam<sup>1,2</sup>, G. Mohana Krishnan<sup>1</sup>, L.TamilMoli<sup>1</sup>, H.B. Chan<sup>1</sup>, W.K. Sinn<sup>1</sup>, K.Y. Lam<sup>1</sup>, L.C. Tan<sup>1</sup>, Md. Yusof b. Ismail<sup>2</sup> and P.Seetha<sup>3</sup>

**Abstract**—The study is conducted with the intention of designing, developing and testing a prototype of a ‘Smart Calling System’ for Mechanical Engineering Department (MED) in Polytechnic Sultan Azlan Shah (PSAS), Behrang Perak. The MED building is consists of 3 floors of staff offices, 4 floors of classrooms and a total of 1388 students. As this involves a large number of students, there is a frequent movement of students flow into the department office to meet their relevant lecturers. The current communication method in MED which is using telephone and PA system is not very effective and has created an unpleasant environment in the staff’s office. Therefore the objective of this study is to develop a “Smart Calling System” for the communication purpose in the MED offices. This study was planned based on the Design Process Model (DPM) activity. Results of the developed prototype showed that it provide as a better communication tool between the lecturers and students.

**Index Terms**—Calling System, Conceptual Design, Prototype, Communication, Design Process Model, Product Design Specification, PIC Controller.

## 1 INTRODUCTION

OLYTECHNIC of Sultan Azlan Shah (PSAS) or previously Pkknown as Polytechnic of Tanjung Malim (PTM) is the 15th polytechnic in Malaysia. It is set up by the Ministry of Higher Education. The PSAS’s organization structure can be categorized mainly into three groups. There are administrative, academic and supporting department. Among the academic department are Mechanical Engineering (MED), Civil Engineering (CED) and Electrical Engineering (EED), Commerce (CD) and General Studies (GS).

The main MED building is consists of 3 floor of staff offices (lecturer rooms), 4 floor of classrooms and a total of 1388 students. In each entrance of staff’s office floor, there is a counter or a boundary where the students are not allowed to cross this point (Fig.1). The students need to call from these counter or boundary point to meet their relevant lecturer’s. Currently there is a no proper system or mechanism for the students to call the relevant lecturers which they wish to meet. The current method of using telephone or PA system is still not preferable. It creates an unpleasant office environment whenever there is a busy movement of students flow into the MED office. Therefore this study is conducted with the intention of designing, developing and testing a prototype of a ‘Smart Calling System’.



Fig. 1. MED Staff’s Office.

## 2 Methodology


### 2.1 Design Process Model (DPM)

The development of ‘Smart Calling System’ is based on the Total Design Process Model1 (Fig.2).

Fig. 2. Total Design Process Model.

### 2.2 Market

This study is focused on communication problems between the students and lecturers in the staff rooms. The communication problem here is referring to the obstacles or problem on the methods or system that is currently used in the MED office. The central idea for this study had been inspired by the facts that, the students and lecturers communication although represent as one of the important needs in daily campus life but there is a no proper system for it. Therefore this proposed “Smart Calling System” is designed to fulfill the student’s needs.



<sup>1</sup>Department of Mechanical Engineering, Polytechnic of Sultan Azlan Shah 35950 Behrang, Perak, Malaysia

<sup>2</sup>Department of Mechanical and Manufacturing Engineering, Universiti Putra Malaysia, 43400 UPM Serdang, Selangor, Malaysia

<sup>3</sup>Sekolah Menengah Kebangsaan Dato' Dol Said, Jalan Dato Dol Said, 78000, Alor Gajah, Melaka. Emel:megam76@gmail.com\*

### 2.3 Product Design Specification (PDS)

According to Pugh<sup>1</sup> and Sapuan<sup>2</sup> there are 32 important criteria of PDS for 'Smart Calling System' design (Fig. 3). Thirteen relevant criteria of PDS are chosen as shown in Table 1.

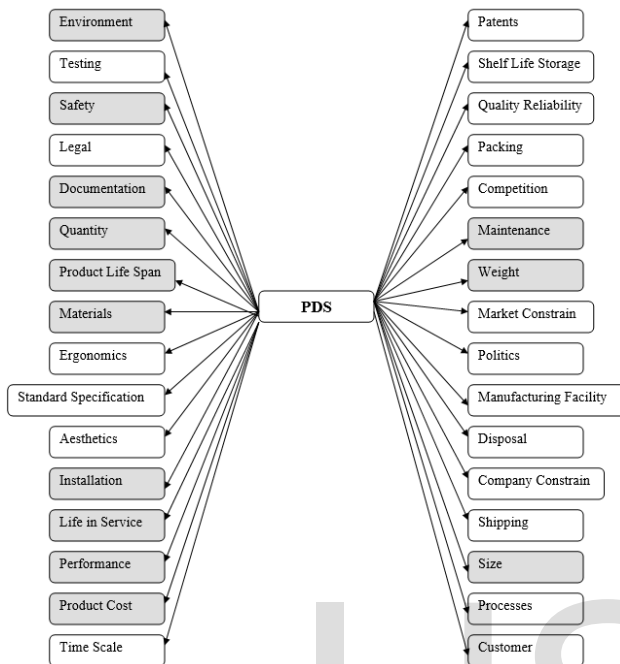


Fig. 3. Elements of Product Design Specification (PDS).

TABLE 1.  
PRODUCT DESIGN SPECIFICATION (PDS) FOR SMART CALLING SYSTEM

NO.	CRITERIA	PARAMETER
1	Performance	<ul style="list-style-type: none"> <li>It should load the staffs name with not more than 14 peoples (with using one PIC controller)</li> <li>Built using 'car modulator' concept.</li> <li>The distance between output and input (calling system) should in the area of frequency within 20m.</li> <li>The staff's name will store in database (pen drive).</li> <li>Buttons are used for the inputs for the system.</li> <li>It should have a device (relays) to control the system operation in the event of power failure.</li> <li>During operation, the name that has been called out should be repeated within 5 seconds, after the first input.</li> <li>It should use a portable power source (electrical or batteries source).</li> </ul>
2	Product Life	<ul style="list-style-type: none"> <li>It should be on the operation for</li> </ul>

3	Span Life in Service	<ul style="list-style-type: none"> <li>within 3 years.</li> <li>It should withstand an operating period of 8 hours uninterrupted use per day for 3 years.</li> </ul>
4	Product Costs	<ul style="list-style-type: none"> <li>It should have an end-user cost of RM 350.</li> <li>The cost of manufacture should be less than RM 100.</li> </ul>
5	Quantity	<ul style="list-style-type: none"> <li>Initially for MED use (4 units).</li> </ul>
6	Maintenance	<ul style="list-style-type: none"> <li>To be maintenance free except for the batteries once in 3 months and a recommended service every year.</li> <li>Batteries changing should be accessible within 15 minutes without using any special tools or equipment.</li> <li>Spares should be available for a year after the product is replaced with a new model.</li> <li>No special tools should be required for maintenance.</li> </ul>
7.	Size	<ul style="list-style-type: none"> <li>Length not to exceed 250mm.</li> <li>Width not to exceed 250mm.</li> <li>Height not to exceed 200mm.</li> </ul>
8.	Weight	<ul style="list-style-type: none"> <li>Weight should not exceed 2 kg.</li> </ul>
9.	Material	<p>Car Modulator, components, materials can be obtain from the following sources:</p> <ul style="list-style-type: none"> <li>www.lelong.com.my<sup>3</sup></li> <li>www.cytron.com.my<sup>4</sup></li> <li>State Electronic Trading Com</li> <li>Nixie Electronic (Malaysia) Sdn. Bhd.</li> <li>Online Components Sdn. Bhd.</li> <li>Syarikat Setia Jaya</li> <li>Nixie Electronic (Malaysia) Sdn. Bhd.</li> </ul>
10.	Safety	<ul style="list-style-type: none"> <li>The safety accept to the proposed design and it's in the market should be considered.</li> </ul>
11.	Installation	<ul style="list-style-type: none"> <li>Will consider interface with other product or be assembled into larger product (fixing holes and lugs, access, the volume available for the product, system compatibility, power compatibility and the like).</li> </ul>
12.	Documentation	<ul style="list-style-type: none"> <li>Product should be supplied with a user manua.</li> </ul>
13.	Environment	<ul style="list-style-type: none"> <li>All aspects of the products likely environment should be considered and investigated (temperature range, shock loading, dirty or dusty etc)</li> </ul>

### 3 DEVELOPMENT OF SMART CALLING SYSTEM

#### 3.1 Conceptual Design

In conceptual design stage solution are generated to meet the PDS (Fig. 4). Basically this calling system involves three main component such as MP3 Modulator (to select relevant name from database), Speaker (as the output device) and PIC controller (to control the programming).

Fig. 4. Basic Conceptual Design for Calling System.

#### 3.2 Development of Conceptual Designs

Based on the criteria, a most suited design (Fig. 5).




on the PDS criteria, a most conceptual is developed (Fig. 5).

panel using system and tory dents



(Fig.6 and Fig.7). A test run the calling sys- was conducted proved satisfac- for users (stu- and staffs).

Fig. 6. Hard- Sys-

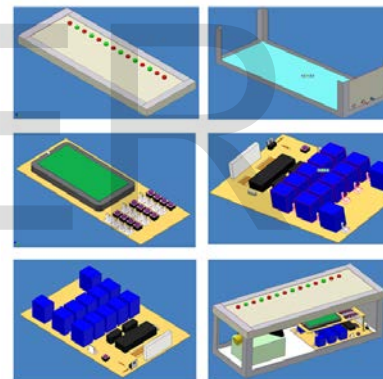


Development of ware for Calling tem.

Fig. 5. Development of Conceptual Design for Calling System.

### 4. RESULTS

#### 4.1 Constructed Calling System

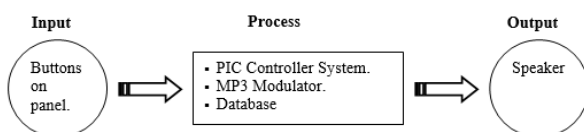

Based from the conceptual design, a list of design processes undertaken to construct and test the calling system. The design process involves developing programming, hardware and casing for

Fig. 7. Development of casing for Calling System Panel.

### 5 CONCLUDING REMARKS

The study focused on designing, developing and testing a prototype of a 'Smart Calling System' for MED in PSAS. The developed calling system enhances the level of communication con- formability between the students and lecturers. The system also provided a more pleasant office environment. The results of the

fitting trials also proved to satisfy the students and office occupants.

#### REFERENCES

- [1] S. Pugh, *“Total Design, Integrated Methods for Successful Product Engineering,”* Addison-Wesley Publishing Company, Wokingham, England, 1991.
- [2] S.M. Sapuan, *“Rekabentuk Kejuruteraan: Ke Arah Persepaduan Rekabentuk dan Pembuatan”*, Era Ilmu Sdn Bhd, Kuala Lumpur, Malaysia, 1999.
- [3] [www.lelong.com.my](http://www.lelong.com.my)
- [4] [www.cytron.com.my](http://www.cytron.com.my)

IJSER