Monitoring the Land Cover Pattern of Jharia for Reclamation (Bastacola, Area) Through GIS and Multi Temporal Remote Sensing

Sunny Soarabh*1, Shahid Anwar1

ABSTRACT - Excavated overburden and ensuing from the surface mining activities pose a long term impact on the environment and the land safety measures. Lack of requisite reclamation of the stripped and the exploited coal in the BASTACOLA (Eastern Jharia, area) has resulted in the loss of substantially important agricultural and urban land. Accurate quantification of the extent of the area occupied by the overburden is important for the assessment and proper restoration of the waste land. Substantial quantity of non urban land monitored can be used to fill the excavated profiles of overburden, thus providing useful reclamation patterns. This research paper investigates the use of multi temporal remote sensing and satellite imagery for the location of the baseline of undulating overburden profiles to further their reclamation due to stripping activities. LandSAT 5 TM multispectral ASTER DEM images of the area (year 2000 and 2010) were used for quantification of overburden. The paper embeds the data acquisition though satellite imagery, data presentation via GIS and image registration and the final analysis and accuracy assessment. The interpolation of results and the statistics acquired can be used for the describing, analyzing and predicting the land use change over the considerable timeframe with the help of the Markov model and statistical and stochastic timeline analysis.

Keywords: Land use and land cover change, Markov model, Reclamation pattern Satellite Remote Sensing, GIS

1.0 Introduction:

ver the decades, drastic and dramatic land use and land cover changes have been observed throughout the demography of the *JHARIA* coal field. The observed biophysical covers of the earth's surface occur due to the variety of human and natural processes have contributed towards the dynamic and the changing face of the Eastern Iharia area. However land uses on the other hand have been extensively affected by the surface mining and extensive excavation and exploitation of the mineral and the coal areas. The idea that envisions the evocation of the project is to provide a model for the reclamation and land use analysis of various timeframe and execute the same using analysis of the MARKOV chain model. Remote sensing data has been widely used by the Mining Industry for decades for the exploration, land use and environmental data analysis. There have been numerous researches incorporating mine monitoring problems with the various digital image classification techniques which range from unsupervised classification to supervised classification, parametric classification to nonparametric classification, per pixel classification to sub-pixel classification to characterize the landscape of large regions by means of assigning pixels of different spectral values to classes.

Under the guidance of Dr. Dheeraj Kumar (Asst. Professor)¹ Sunil Kumar, Senior lab incharge, Geomatics and Mine surveying¹ ¹Department of mining engineering, Indian School of Mines, Dhanbad, India **Corresponding Author**: "sunny.soarabh@gmail.com

The changes in the land cover occurs even in the absence of human activities through natural processes where the land use change is the manipulation of land cover by human being for various purposes-food ,fuel wood , timber , fodder , leaf , litter, medicine ,raw materials and recreation. So many socio economic factors have been reviewed from different perspectives in order to identify the drivers of change, their process and the consequences. Use of the markovian analysis for the detection of the change and to find the probability of the change occurrence over a finite area is a new concept applied to the field of the Geomatics. Remote sensing information, in concert with available enabling technologies such as GPS and GIS, can form the information base upon which sound planning decisions can be made, while remaining cost-effective (Franklin et al., 2000). Clearly, however, the fast-paced developmental nature of remote sensing technology often overlooks the needs of end-users as it '...continues to outpace the accumulation of experience and understanding' (Franklin, 2001: 137). As a result, effective realworld operational examples of land-cover and land-use change remain relatively rare (Loveland et al., \2002; Rogan et al., 2003).

Geographical information systems (GIS) and remote sensing are well –established Information Technologies , whose applications in land and natural resource management are widely recognized. These technologies provide a cost effective and accurate alternative to the conventional approaches used for the determination of the landscape dynamics. Digital change –detection techniques based on multi-temporal and multi spectral remote sensed data have demonstrated a great potential as a means for the understanding of the landscape dynamics to detect, identify, map and monitor the differences in the land use/land cover pattern over the times, irrespective of the casual factors. Recent satellite improvements in the satellite image quality and the availability has made it possible to analyze at much larger scale than in the past. Several studies of the subject has been done on varying subjects of the same domain, including the paper including the *Surface coal mine monitoring using multi temporal remote sensing and high resolution imagery* by Nuray Demirel , M. Kemal Emil, H. Sebnem Duzgun.

The present paper deals with the presentation and regression of the time series and analysis using the markovian model to analyze the base and the profile line suitable for the reclamation level of the entire area. An understanding can be developed on the basis of the markovian approach for the predictability of the next profile level / plane in the future and is ascertained by the matrix method applied to obtain it. The present study was undertaken to analyze for the changes that may have occurred on the topography of the jharia coal field by interpreting the multi temporal remote sensed data.

2.0 Material And Methodology:

2.1 Study Area

Jharia Coal field area has always attracted people over the past centuries due to its large number of the bituminous coal (suitable for the coke) production in INDIA. It share most of the coking coal production in INDIA. Mining activities has been practiced in the Jharia coal field since eighteenth century. The extraction of coal has been carried out by open cast mining and underground mining methods. The present area of the eastern Jharia located on the out skirts of the district is a region located on the latitude of 23.755266447N and 86.4214699E. The DEM of the area on the USGS explorer belonged to the path 140 and row 44.

2.2 Methodology

In the present study of the detection of the profile level for the monitoring and filling of the excavated profiles of the over burden was found out using the comprehensive study of the ASTERDEM geo tiff of the LAND SAT 5 TM images website. The images were reprojected into the geographical coordinate system. The area of interest of the Iharia coal field was obtained using the topographical and geological map of jharia coal field. The KMZ file obtained from the Google earth was them formatted to be superimposed on to the present DEM of the area to get the required area of interest. Unsupervised classification was done to obtain the two land classes besides obtaining areas and the volumes of the non urban and the overburden lands. The ASTER DEM (fig. 2.2) obtained was used to prepare the rastin, thus calculating the area above and below the mean reference levels using the ESRI Arc Scene program. The optimum level of the reference plane level required for the reclamation was calculated using the method of C/C++ programming using bisection method and the volume of the area above the reference plane to be shifted to the desired depression/ basin formed due to the undulation of the overburden proceeding the previous years.

Statistics For Suggested Reclaimation

The total coverage may not always be the most effective method of analysis for the portion through which the required area would be taken to fit in for the present void. Instead of taking up the area coverage for the land use land cover pattern for each of the category at each date into account, pixel based comparison was used to locate the area required to be shifted with the pixel change analysis. The data of the findings associated with the following pixel analysis is shown in the chart fig 3.1. Using the method of iteration equipped with the programs in C++ the, altitude was interpolated to find the required volume of land fill above the reference plane using the table 3.1. Equation used (eqn. i) followed by the repeated results over the recursion yielded the 160.830 m as the reference plane and the volume of the over burden that needs to be moved is 33464867.98 m³ over a surface area of 932369.79m². The volume of the landfill occupying the region above the landfill has been depicted in the legend of fig 2.3 as white and the basin/depression as green or pale yellow.

--equation (i)

Future Work Using Markov Chain Analysis

 $935100 \times h = V_{a+}V_{b}$

Cross tabulation is a means to determine quantities of conversions from a particular land cover to another land cover category at a later date. The change matrices based on post classification comparison were obtained and are shown in Tables 2. The change of different land class into another land class for the study area can be observed from the matrix if instead we used h number of the land use category. Then the transition count matrix of land use category between two different time periods is given as:

	[n11	•••	n1h]
N=	:	•.	:
	lnh1	•••	nhh


Give the observed count matrix, the maximum likelihood estimate of the transition matrix is simply the row proportions of N

$$M_t = \{\Theta_{ij}\} \quad \Theta_{ij} = n_{ij} / \sum_{j=1}^h n_{ij}$$

 M_t is the transition matrix of the Markov chain for the unit time interval is given as ,

$$M_l = M_t (1/t) = PD^{1/t} P^{-1}$$

Where, P and D are the orthogonal and diagonal (Eigen values) matrices respectively and,

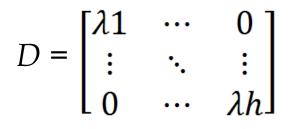

To model a change for the land reclamation level profile and the land cover monitoring by markov chain , the land cover distribution at a time t2 was calculated from the initial land use distribution at a time t1by means of a transition matrix (Lambin 1994). The Markov chain can be expressed as:

$$\mathcal{V}_{t2} = M^* V_{t1} \tag{1}$$

Where V_{t1} is the input land use/cover proportion column vector, V_{t2} is the output land use /cover proportion column vector and M is an *m* x *n* transition matrix for the time interval t = t1- t2. When the transition probabilities depend only on the time interval *t*, and if the time period at which the process is examined is of no relevance, the markov chain is said to be stationary or homogeneous in time (Karlin and Taylor 1975). If the two estimates of the transition matrix of a land use /land cover change process are available for two calibrations time intervals, these estimates must be adjusted to an equivalent calibration time period to allow for comparisons and to assess the stationary of the process (Bell and Hinojosa 1977). For this study , in future the shift in the reference reclamation level would be find out with the probability indexes of the Barren land and Overburden to approximate the location and the

. It has a rapid and extensive changing landscape and topography in terms of mining activities as well as in terms of barren land and over burden in last two decades. Optimum reclamation of the topography is the dire need prior to the advantage of the region. In this case prediction of the optimum reclamation level plane is required for establishing selective, planning and implementation of reclamation strategy and rehabilitation plan to meet the growing needs and welfare in the state of increasing mining activities in this area.

Acknowledgement

The authors gratefully acknowledge the support of *Dr. Dheeraj Kumar Assoc. Professor ISM Dhanbad and Sunil Kumar, Senior lab incharge, Geomatics and Mine surveying* for the software overheads and data acquisition. The author also extends its support to *Mayank Yadav ISM Dhanbad* for the data mining and computational assessment.

coordinates of the level plane. The transition matrices need to be obtained and the modeling process need to be implemented using the algorithm supplied with the ENVI software.

3.0 Results And Conclusion

The monitoring of the area with multi temporal satellite imagery provides the information about the land use /land cover pattern. The DEM obtained has been classified under different color schemes for different altitudes in fig 2.3. The White and gray portions indicative of higher altitudes are overburden that need to be moved and the basin / depression for the land fill sites to obtain the reclaimed level plane. The total over burden area shown in red 40.96% needs to be shifted in levels to the adjacent basins to create a reference level of 160.830 m. The total volume and area that needs to be drifted is 33464867.98 m³ and 932369.79m² respectively. Poor planning of over burden disposal of the large open cast mine of BASTACOLA has in turn contributed adversely to increase the barren land.

The application of markovian analysis as the future work, will help to provide the approximate reclamation level for the near future due to ongoing mining activities in the neighboring regions. Transitional probability matrix for the year 2011-2020 will provide the change prediction for near future and an empirical equation in terms of larger lease hold area eqn. a and the reclamation level. Jharia Coal field is the third largest coking producing area in the world

Bibliography

- 1. Singh, A., Digital change detection techniques using remotely-sensed data. International Journal of Remote Sensing, 10, 9891003, 1989.
- Seto, K. C., Woodstock, C.E., Song, C., Huang, X., Lu, J. And Kauffmann, R. K., Monitoring the land use change in the Pearl River Delta using Land Sat- TM. International Journal of Remote sensing, Vol. 23, No. 10 198520004, 2002.
- 3. Surface coal mine area monitoring using multitemporal high-resolution satellite imagery
- Nuray Demirel, M. Kemal Emil, H. Sebnem Duzgun METU Mining Engineering Department, 06531 Ankara, Turkey



Fig. 2.1 KMZ image of the study area BASTACOLA Eastern Jharia (Rajapur OCP)_Sunny Soarabh

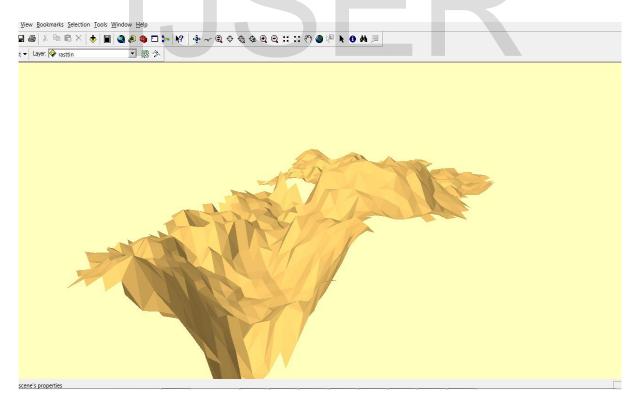


Fig. 2.2 Rastin of the area of interest as depicted in ARC scene_Sunny Soarabh

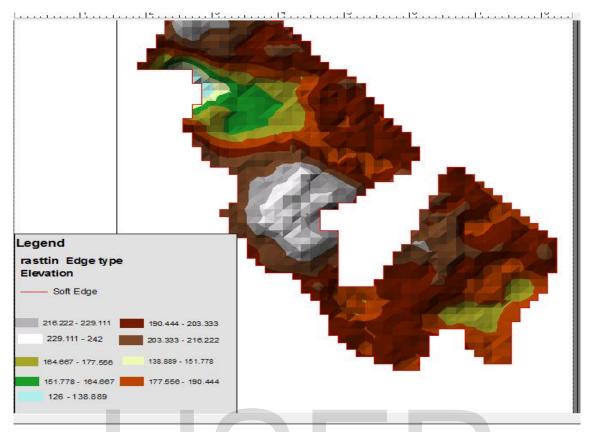


Fig. 2.3 TIN of the area of interest with the altitude legend of the area of interest_Sunny Soarabh

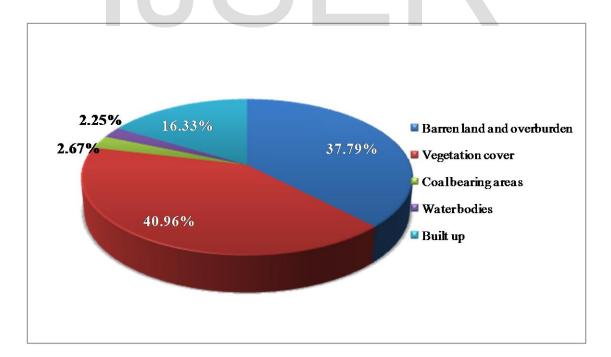


Fig. 3.1 Land cover pattern of the BASTACOAL area (Eastern Jharia) in Oct 2011

Volume above the reference plane (V _a)	Volume below the reference plane (V _b)	Total lease hold area	Height of the reference plane
65744441.07	0	935100.00	126
61070396.34	455.21	935100.00	131
56404336.46	10895.38	935100.00	136
51750942.83	330001.76	935100.00	141
47109812.15	67371.07	935100.00	146
33311769.16	116460.13	935100.00	151
37876192.04	184750.97	935100.00	156
33311769.16	295828.08	935100.00	161
28864320.91	523879.84	935100.00	166
24523263.67	858322.60	935100.00	171
20323816.23	1334375.76	935100.00	176
16330824.75	2016883.68	935100.00	181
12590761.70	2952320.62	935100.00	186
9219435.60	4256494.53	935100.00	191
6480593.71	6193152.63	935100.00	196
4467231.31	8805290.24	935100.00	201
3048348.06	12111906.99	935100.00	206
2002057.26	15741116.18	935100.00	211
1274616.78	19689175.71	935100.00	216
762935.09	23852994.02	935100.00	221
385562.14	28151121.06	935100.00	226
143123.33	32584182.26	935100.00	231
30360.93	37146919.86	935100.00	236
0	42727158.93	935100.00	242

Table 3.1 Surface area and volumes of the AOI above and below the reference plane for Data mining



B

Sunny Soarabh

Shahid Anwar